

1

Products

100-460
100-302




EXCEL Fully Shielded Patch Panel

2

Cable preparation


UTP

Conductors

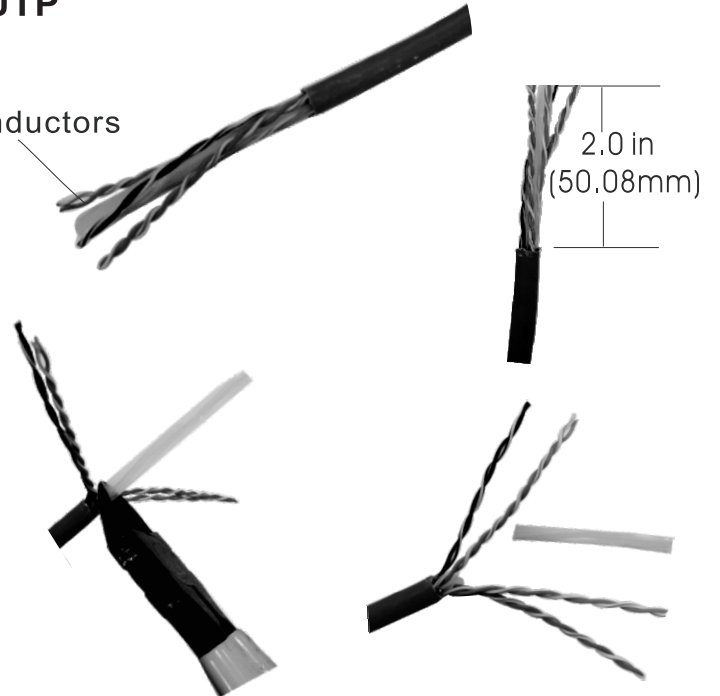

3

Termination



35-485
110 Tool



35-480
LSA

Choose a proper
impact tool.

4

Product information

Cable

Bend Radius: 8 x OD-Installing
4 x OD-Installed

NVP: 69%

Temperature: 0-60 Degrees C

*568B	568A
1-White/Orange	1-White/Green
2-Orange	2-Green
3-White/Green	3-White/Orange
4-Blue	4-Blue
5-White/Blue	5-White/Blue
6-Green	6-Orange
7-White/Brown	7-White/Brown
8-Brown	8-Brown

*Recommended Colour code