

OPERATION MANUAL

Monitoring Host

Table of Contents

Preparation	3	Historical alarms and data	
Login Operations		5.1 Historical alarm query	11
1.1 WEB Browser login	3	5.2 Historical alarms are exported	11
Top		5.3 Historical data query	12
2.1 Homepage content	4	5.4 Historical data export	13
Interface Presentation		Setup	
3.1 Distribution	5	6.1 Basic information about the device	14
3.2 Air conditioning	6	6.2 Device queries	15
3.3 UPS	7	6.3 Alarm notification	
3.4 Environment	8	6.3.1 Alarm notification type	16
Alarm		6.3.2 Method of notification	17
4.1 Query the current real-time alarms	9	6.3.3 Scheduled Notification	18
4.2 Query the acknowledged alarm	9	6.4 Alarm configuration	
4.3 Query historical alarms	10	6.4.1 Configure the alarm type	19
		6.4.2 Alarm parameters are modified	20
		6.5 Permission settings	21
		Troubleshooting Common Issues	22

Preparation


1. One Monitoring Host and one PC computer;
2. The PC computer is connected to the accessible collector network and can ping the host IP of the communication ring; Install a browser with the Chrome kernel.

Login Operations

1.1 WEB Browser login

1. Open the browser with Chrome kernel on your PC computer and select Chrome kernel.
2. Enter the IP address of the Monitoring Host


<http://192.168.1.100>

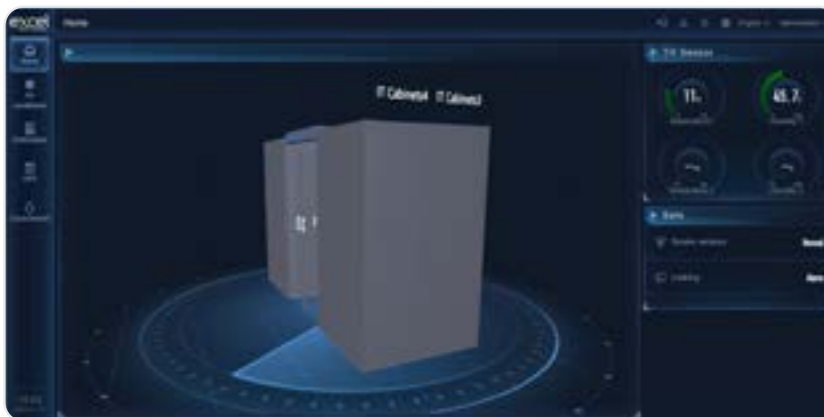

3. Click Login in the upper right corner of the webpage, Username: **admin** (default), password: **12345** (default), you can log in to the WEB management interface. Currently, you don't need to log in to view the running status of all devices.

Top

2.1 Homepage content

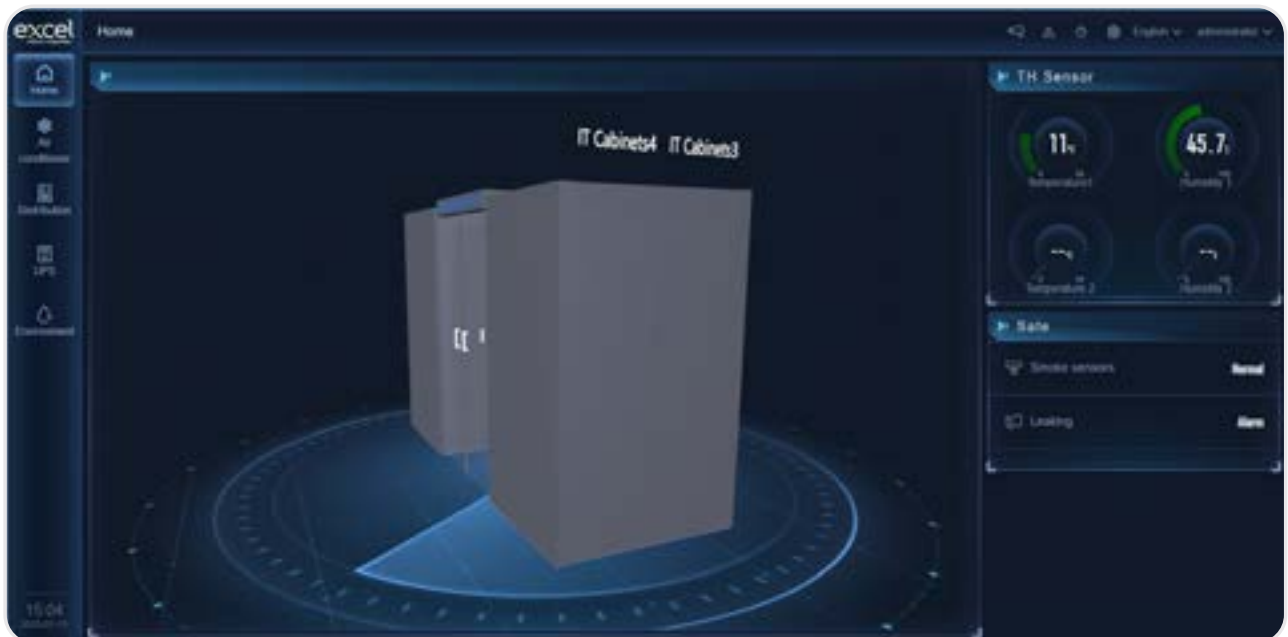

1. **Logo display area**

Display the app logo.

2. **Module app bar**

It can display different application modules, such as power distribution module data, air conditioning status information, UPS operation data, environmental status, access control security, etc., and the columns can be customized.

3. **Data display area**

Support for 2D/3D interface configuration based on the layout of the machine room is available, allowing for data display through labels, charts, curves, bar graphs, buttons, characters, and other configuration options, with flexible adjustments to the interface layout.

4. **Function settings area**

You can view real-time videos, current alarm data, and historical data.


Interface Presentation

3.1 Distribution



1. Voltage (V)
Including: phase A, phase B, phase C voltage.
2. Current (A)
Contains: phase A, phase B, phase C current.
3. Frequency (Hz)
4. Active Power (KW)
Including: phase A, phase B, phase C active power.
5. Power Factor
Contains: phase A, phase B, phase C power factor.
6. Active electrical energy (KWH)

3.2 Air conditioning

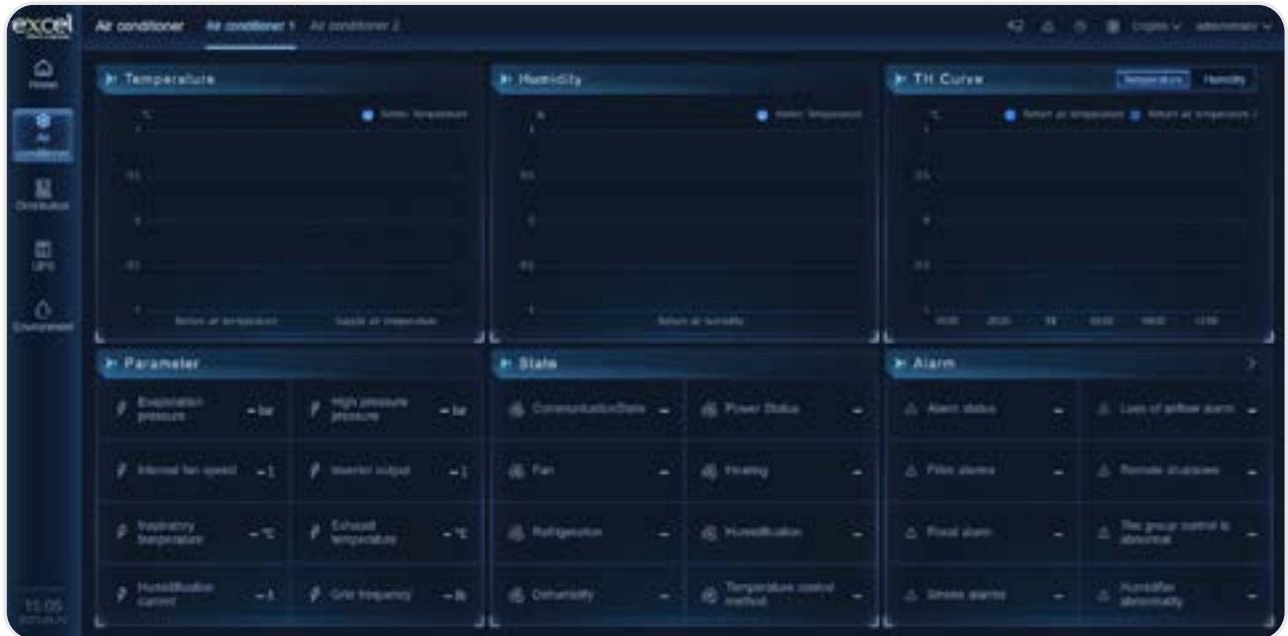

1. Select the air conditioner number you want to view. Support the individual selection and viewing of multiple air conditioners.
2. Basic information: return air temperature, return air humidity, outlet air temperature.
3. Status: the operation status of fans, compressors, heaters, dehumidifiers, and the communication status of air conditioning equipment.
 - (1) The status red indicates that an alarm is generated
4. Control: The interface can operate on/off, and the current on/off status can be viewed.
 - (1) Click the icon to open the control interface
 - (2) In the pop-up interface, select Power On/Off
5. Detailed parameters: fan speed, exhaust temperature, etc.

3.3 UPS



1. Select the UPS you want to view. Support for individual selection and viewing of multiple UPS.
2. UPS input information: input voltage, input frequency, bypass voltage.
3. UPS output information: output voltage, output current, output power.
4. UPS Status: Power Supply Mode, Battery Voltage, Maintenance Bypass Switch, UPS Communication Status
5. UPS operating schematic.


3.4 Environment



1. Ambient temperature and humidity, the average temperature of the channel.
 2. Environmental water leakage status, infrared status, smoke alarm.
- (1) Red indicates the alarm status


Alarm

4.1 Query the current real-time alarms

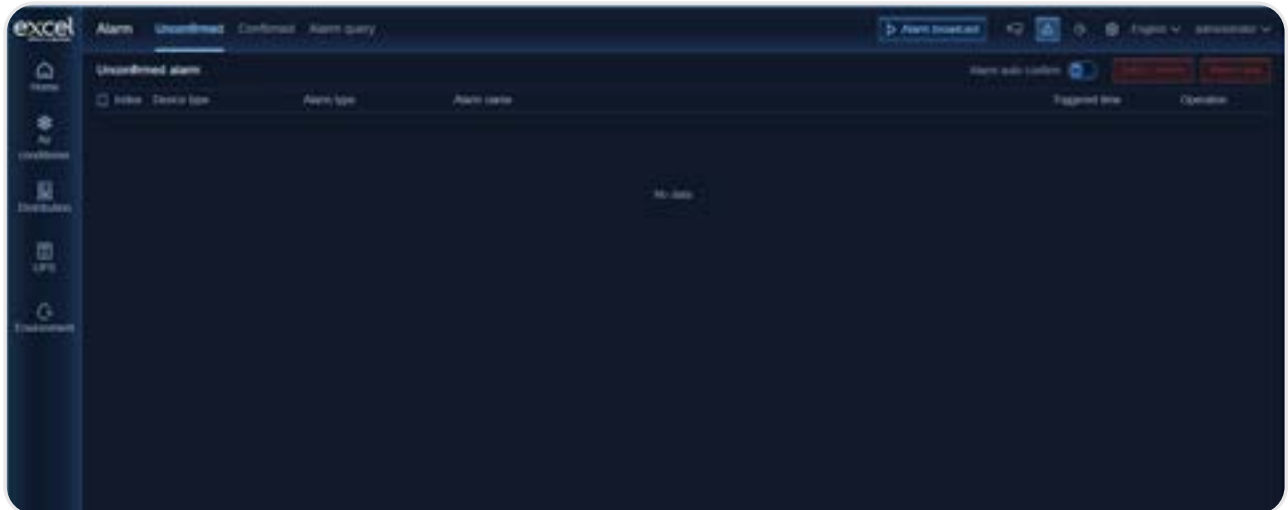

If the automatic confirmation of alarms is selected, it will automatically change to a confirmed status after the alarm ends; if not selected, it will be in manual confirmation mode, requiring manual confirmation.

4.2 Query the acknowledged alarm

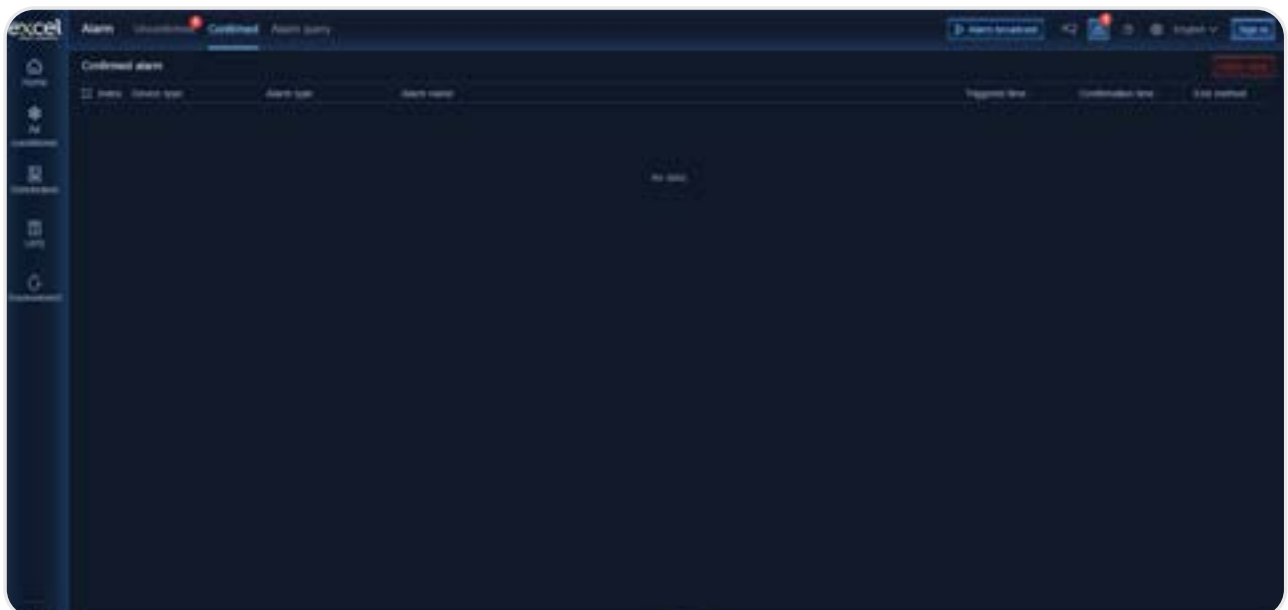

4.3 Query historical alarms

The screenshot displays the 'Alarm query' interface in the 'excel' system. The interface is divided into a sidebar on the left and a main content area. The sidebar contains navigation icons for Home, All, Condition, Distribution, IRT, and Document. The main content area has a top bar with the title 'Alarm query' and a search bar. Below the top bar, there are filters for Alarm type, Alarm status, Confirmation status, and Alarm source, all set to 'All'. A date range filter is also present, showing '2025-05-10 15:07:19' to '2025-05-11 15:07:19'. The main area contains a table of alarm events. The table has the following columns: Index, Alarm name, Alarm type, Generation time, End time, Confirmed, Confirmation time, End method, Confirmation content, and Operation. Two alarm events are listed:

Index	Alarm name	Alarm type	Generation time	End time	Confirmed	Confirmation time	End method	Confirmation content	Operation
1	Import@Capture device excelDoorDev@Door@Online status Import@Communication State	Communication State	2025-05-10 15:07:19	2025-05-10 15:07:19	Yes	2025-05-10 15:07:19	Automatic end		Confirm
2	Import@Capture device excelDoorDev@Door@Online status Import@Communication State	Communication State	2025-05-10 15:07:19	2025-05-10 15:07:19	No		Automatic end		Confirm

Historical alarms and data

5.1 Historical alarm query



1. List mode

5.2 Historical alarms are exported




1. Export (local), you can export historical alarm data to the local computer through the web page, and the web browser will automatically download the “Historical Alarm .xlsx” file to the local computer.
2. Export (USB flash drive), you need to plug in the USB port of the collector, plug in the USB flash drive, and after the device is identified to the USB flash drive, you can choose to export the “Historical Alarm .xlsx” to the USB flash drive.

5.3 Historical data query

The screenshot displays the 'Device point value' table within the Excel network management software. The table contains the following data:

No.	Name	Point value description	Point value	Update time	Time consuming(s)	Unit	Operation
1	Current status	Current status	0	2024-01-12 17:38:32	1.50		History Operation
2	Event status	Event status	0	2024-01-12 17:38:32	1.50		History Operation
3	Status in automatic status of state	Automatic status of state	0	2024-01-12 17:38:32	1.50		History Operation
4	Open door status	Open door status	0	2024-01-12 17:38:32	1.50		History Operation
5	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
6	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
7	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
8	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
9	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
10	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
11	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
12	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
13	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
14	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
15	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
16	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
17	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
18	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
19	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
20	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
21	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation
22	Access control	Access control	0	2024-01-12 17:38:32	1.50		History Operation


5.4 Historical data export

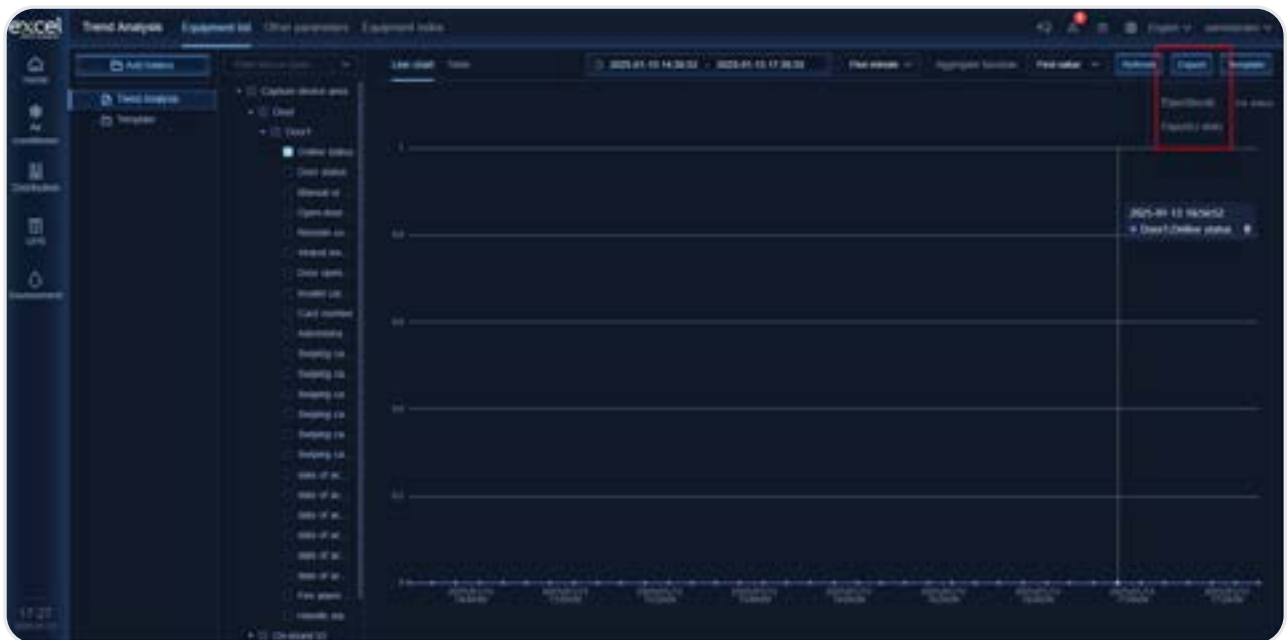

1. Export (local), you can export historical data to your local computer through a web page, and the web browser will automatically download the historical data file to your local computer.
2. Export (U disk), you need to plug in the USB port of the collector, plug in the U disk, and after the device is recognized to the U disk, you can choose to export the historical data to the U disk.

Setup

6.1 Basic information about the device

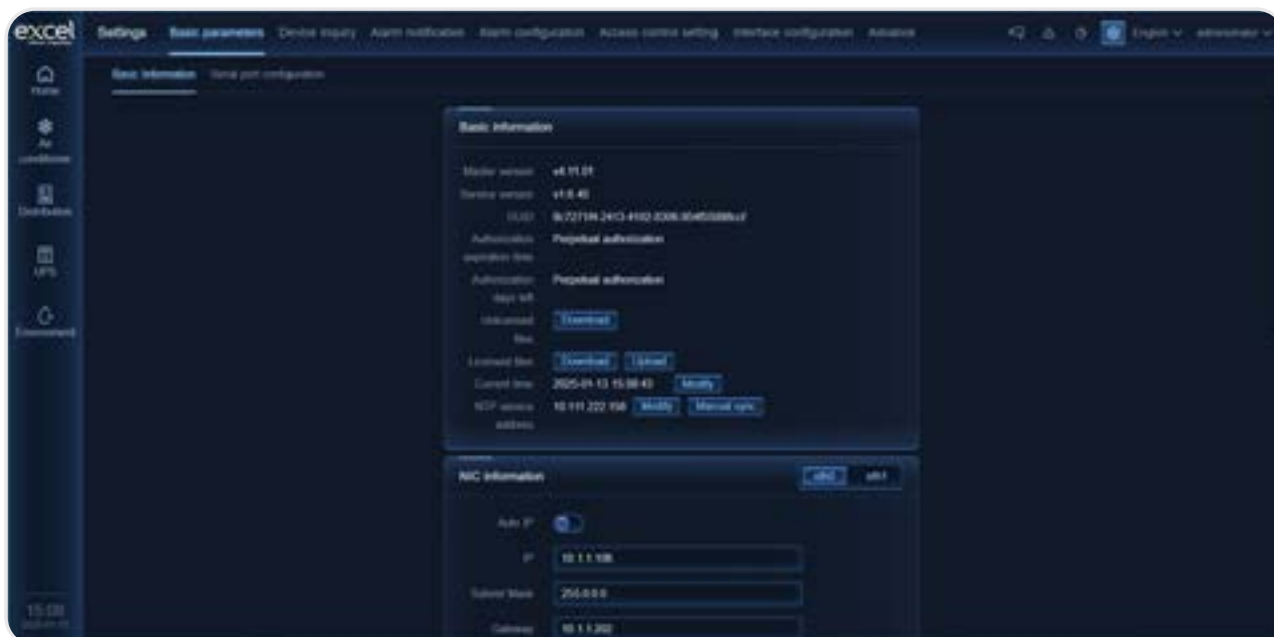

1. Basic information: including front-end version, service version, authorization information, current system time, etc.
2. NIC information: including the IP, subnet mask, gateway and other network parameters of the device, which can be edited and modified to new parameters.
3. TF card information: display the insertion status and capacity information of the card.
4. Hard disk information: displays the hard disk capacity usage of the current collector.
5. Server: The collector can be remotely controlled to restart and shut down.


6.2 Device queries

[illegible]

1. You can view the device tree, the online status of the device, and the specific point value of the device.
2. To view the historical data of a point value, you can directly query the historical data of a point value through the point value history button on this page.

6.3 Alarm notification

6.3.1 Alarm notification type

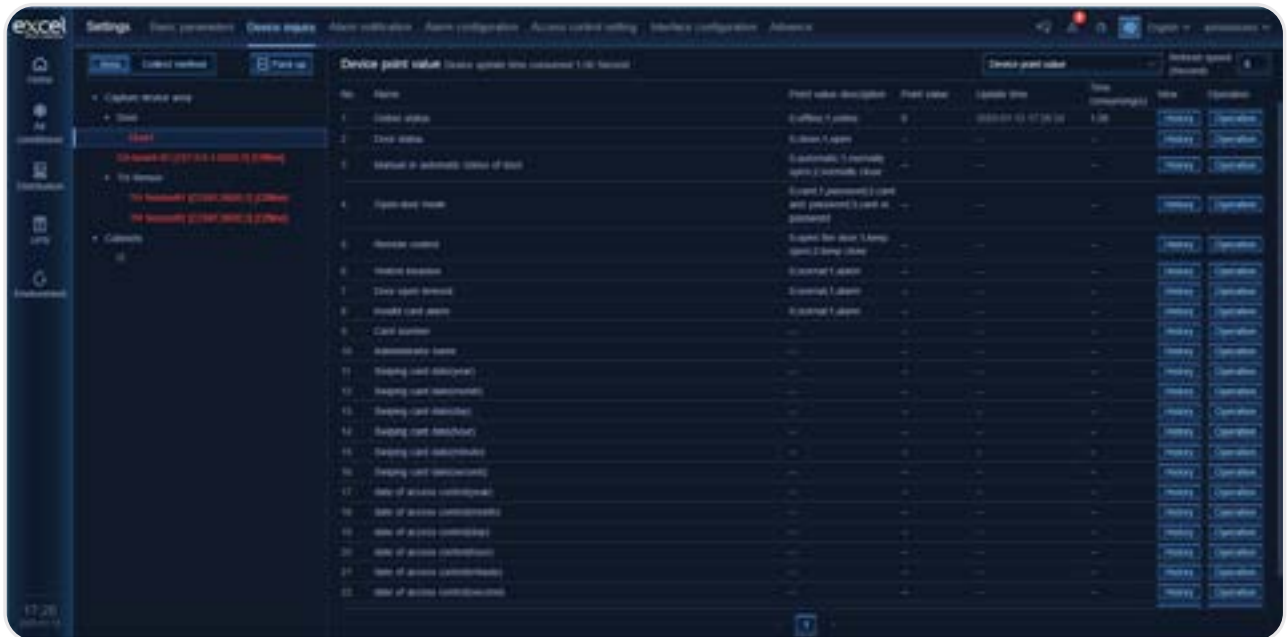


1. Configure each type of alarm, define different alarm notification types, and can include SMS, phone call, and email notification types.

6.3.2 Method of notification



1. You can define the alarm notification method, there are three alarm notification methods: SMS, phone and email, and you can choose to enable or disable each mode.
2. After the email is configured, you can send a test email to verify whether the email configuration is normal.


6.3.3 Scheduled Notification

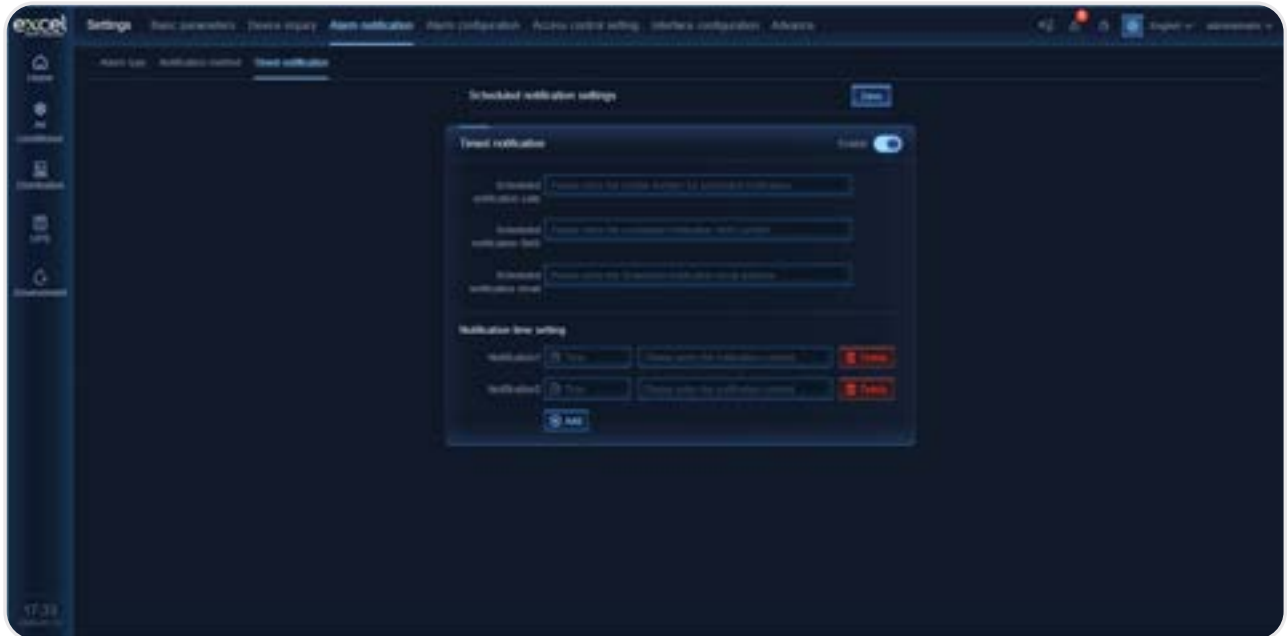


1. You can configure the method of scheduled notifications (SMS, phone calls, and emails), the time point of the scheduled notification, and the content of the notification.

6.4 Alarm configuration

6.4.1 Configure the alarm type

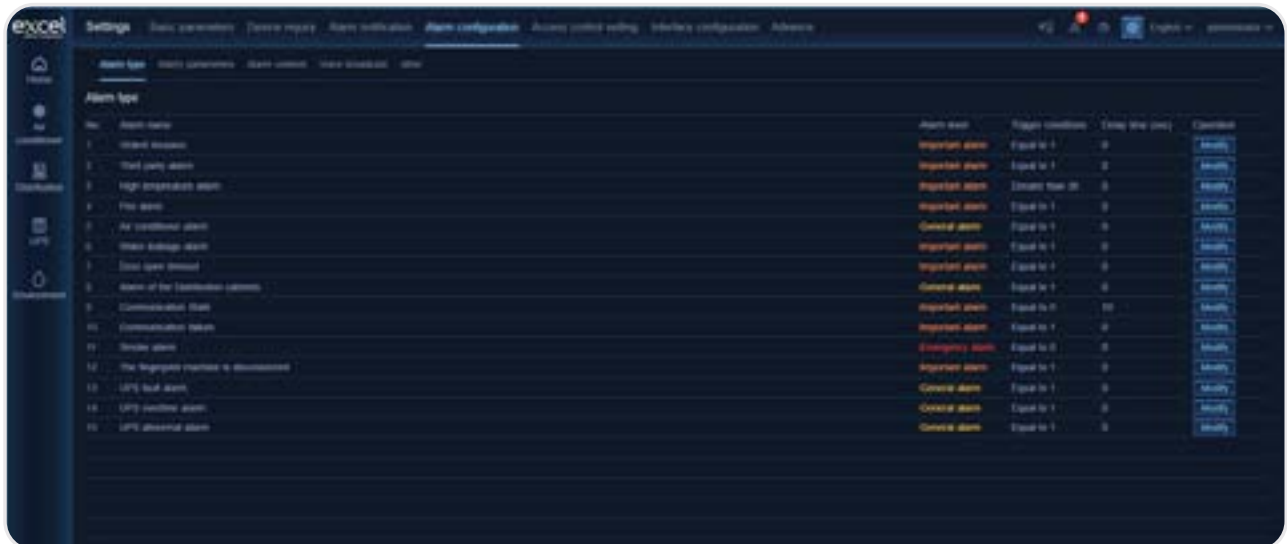


1. You can modify the type of defined alarm, click the Modify button, and the Modify page will pop up to modify it.

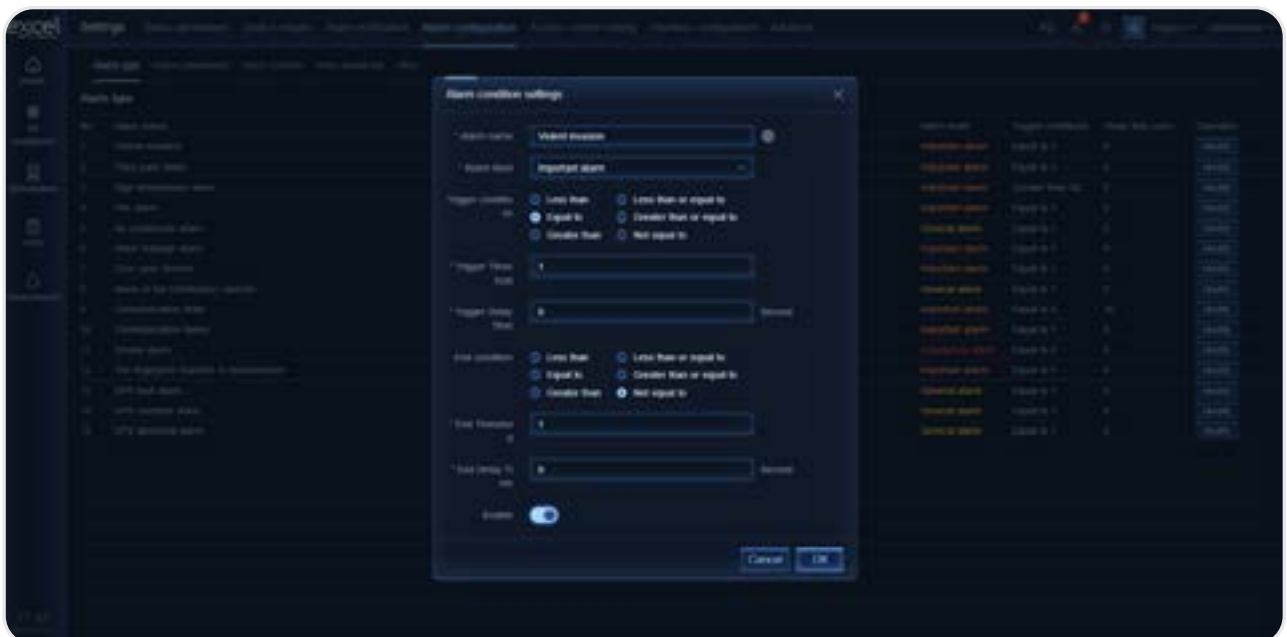


6.4.2 Alarm parameters are modified



1. You can modify the custom alarm corresponding to the device point, click the Modify button to modify it, and select the alarm type from the pop-up interface

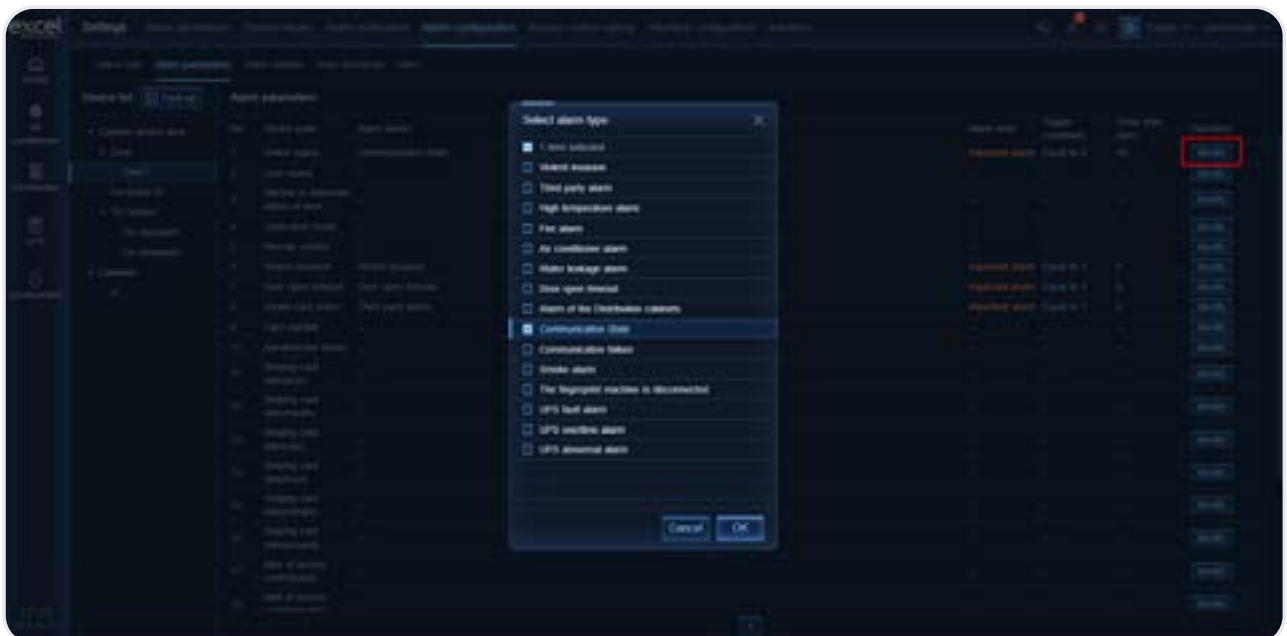

6.5 Permission settings

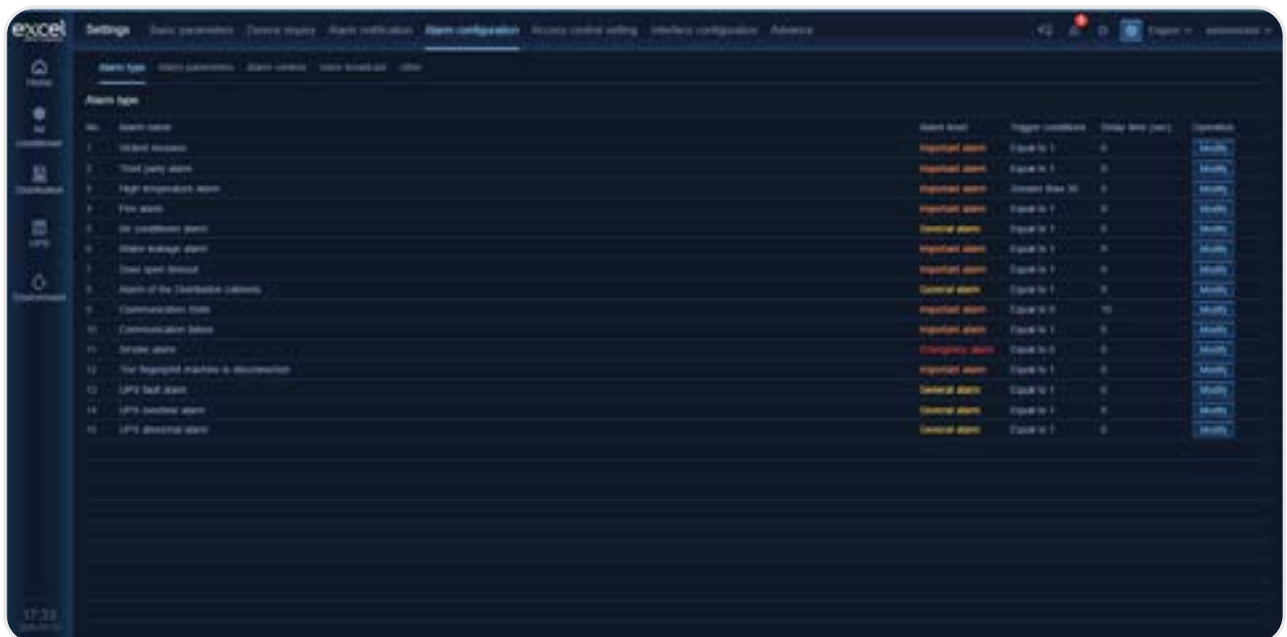

1. Different accounts can be added.
2. At present, there is no distinction between the permissions of different accounts.

Troubleshooting Common Issues

The display screen on the control cabinet has no display on touch

Troubleshooting method:

1. Does the screen have electricity?
2. Is the Ethernet cable or HDMI cable falling off or loose?
3. Does the dynamic environment monitoring host have electricity?
4. Is the USB touch cable falling off or loose?

Unable to log in to the device web page

Troubleshooting method:

1. Does the dynamic environment monitoring host have electricity?
2. Is the network cable connected?
3. Is the IP address of the dynamic environment monitoring host correct? You can search through the collection service software to check whether the device is online.

Historical data cannot be queried

Troubleshooting method:

1. Is the TF card inserted?
2. Is the TF card damaged?
3. You can view the information from “Settings” and “Basic Information”.

The web browser display interface is misaligned


Troubleshooting method:

1. The browser does not use a browser with the Chrome engine and instead uses the Chrome engine.
2. The appropriate scaling ratio has not been selected. Please adjust the scaling ratio on the PC side according to the actual situation for display.

The system time difference is quite large

Troubleshooting method:

1. The dynamic environment host does not have an installed battery or the battery level is low; it is necessary to install/replace the button battery.
2. The system supports NTP time synchronization; please contact the maintenance administrator to set the NTP time synchronization server.
3. “Set” -> “Basic Information” -> “Fundamental Information”, reset the time.

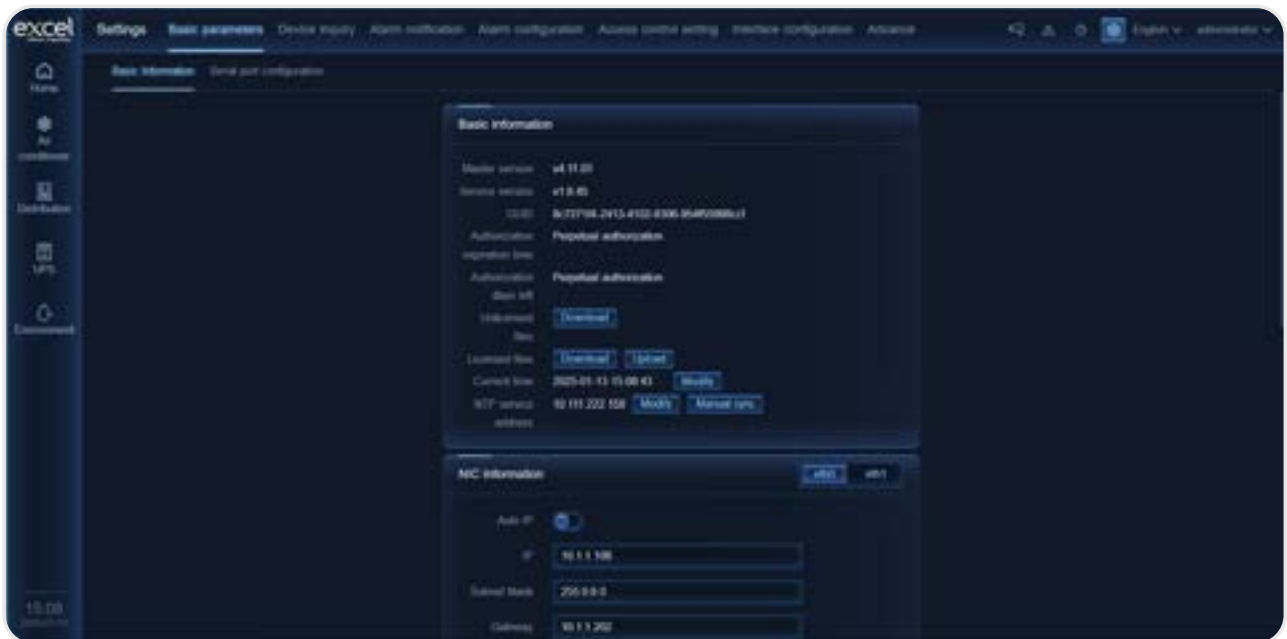

ELEVATE

Future Faster

elevate@excel-networking.com

elevate.excel-networking.com