

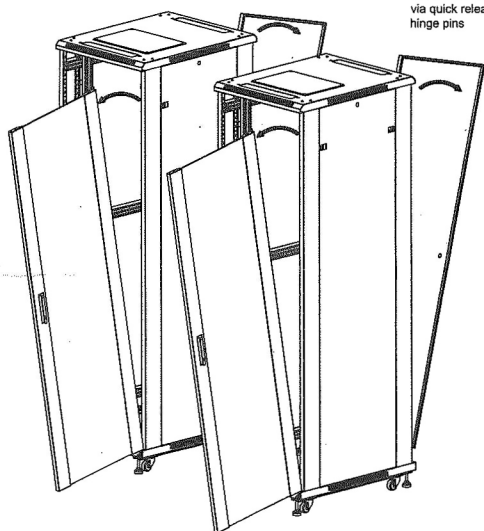


Kit Contents:

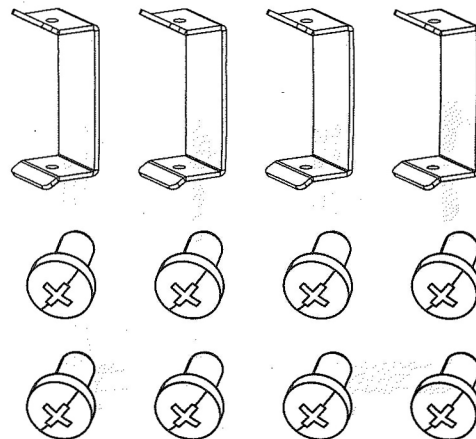



Remove front and rear doors
via quick release spring loaded
hinge pins

a

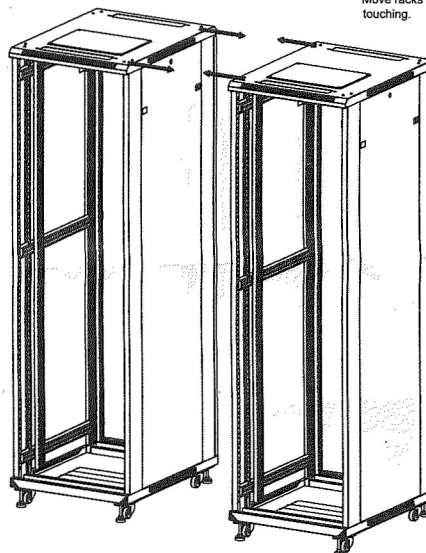

Move racks together until sides are
touching.

b

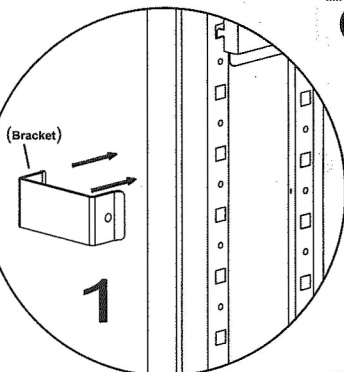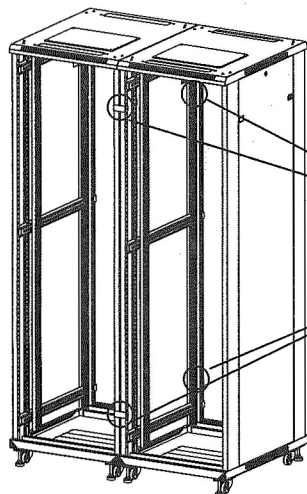


1

IMPORTANT



Make sure both racks
are level with each
other.

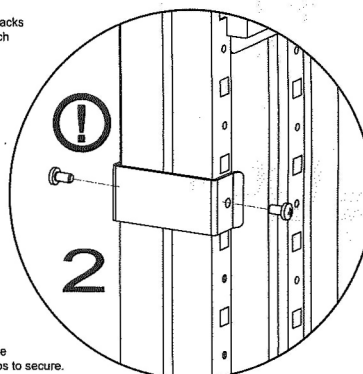

2



Fit 4 (brackets) into frame
slots. Press down on clips to secure.

IMPORTANT



Make sure all 4 bracket are fully
engaged.
Secure each bracket with two M5x10
self tapping screws


c

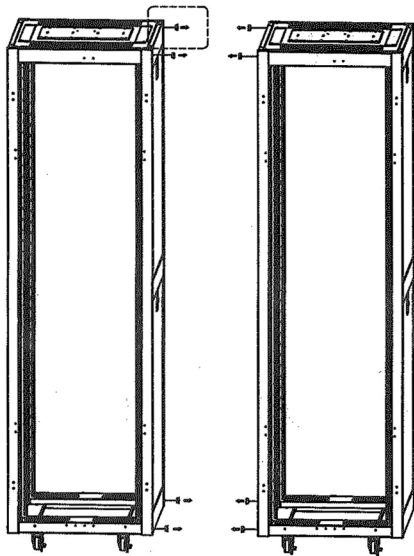

Remove the plastic cover at top of rack side the rack (8 pcs).



Note:
Remove front and rear doors by opening and simply lifting of the hinge pin assembly!

x 8 ①

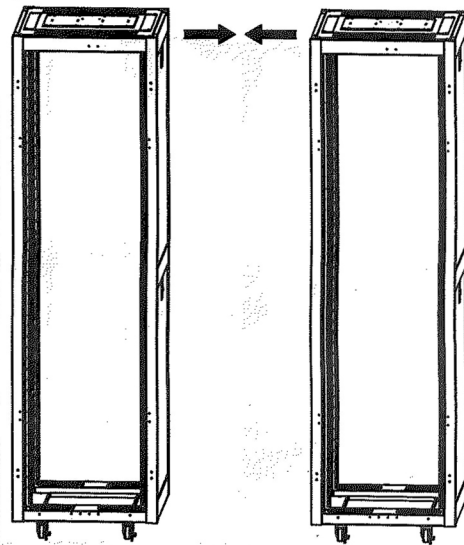

Move racks together until sides are touching



②

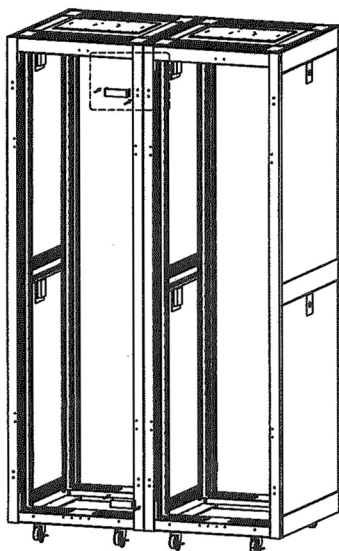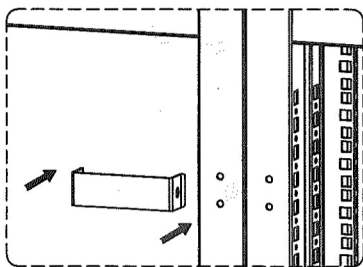

Fix the bracket to the top and bottom of the front and rear rack frame posts .

x 4

③

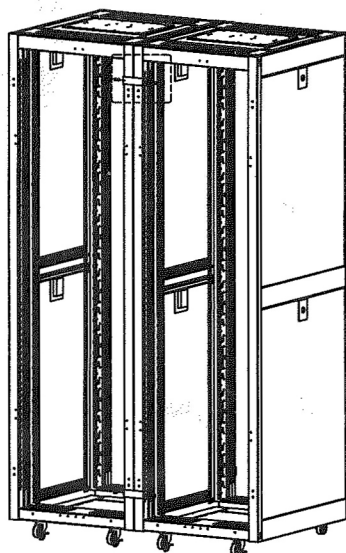



Secure each bracket with two M5X10 Self-tapping screws

x 8



④

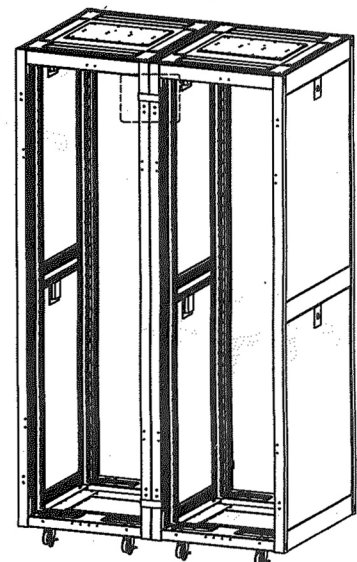

Baying is Complete

⑤