


AXIS C1211-E Network Ceiling Speaker

Discrete in-ceiling installation—small

AXIS C1211-E is an all-in-one speaker system that makes voice announcements smart and easy. It connects to standard network using one cable for both power (PoE) and connectivity. AXIS C1211-E offers flexible, discrete recessed ceiling installation, ideal for indoor environments but can also be used for protected outdoor areas like under the eaves. Additionally, it features a backbox that meets plenum requirements. It offers easy integration with your video management software (VMS), VoIP telephony, analytics, and more. Including a preconfigured digital signal processor (DSP) it produces clear voice every time. It also features a built-in microphone enabling remote health testing and 2-way audio talk-back. Furthermore, the embedded audio management software supports user, content, zone, and scheduling management.

- > [All-in-one speaker system](#)
- > [Connects to standard network](#)
- > [Easy installation with just one network cable \(PoE\)](#)
- > [Scalable and easy to integrate](#)
- > [Remote health testing](#)

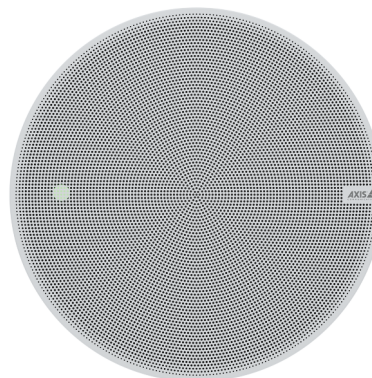

AXIS C1211-E Network Ceiling Speaker

Audio hardware		Intelligent audio	Auto Speaker Test (verification via built-in microphone)
Enclosure	One way enclosure with 4 inches broadband dynamic cone speaker	Event triggers	Call, virtual inputs, external input, AXIS Camera Application Platform (ACAP)
Max sound pressure level	93 dB	Event actions	Play audio clip, send SNMP trap, send Auto Speaker Test, status LED, File upload via HTTP, network share and email, Notification via email, HTTP, HTTPS and TCP, external output activation
Frequency response	40 Hz - 16 kHz	Built-in installation aids	Test tone verification and identification
Coverage pattern	130° coaxial	General	
Audio input/output	Built-in microphone (can be disabled) External microphone, Line in	Casing	Baffle: Plastic Top cover: Plastic Mesh: Surface-treated steel plate Mesh color: Off-white (RAL 9010 or equivalent) Repaintable. For repainting instructions and impact on warranty, contact your Axis partner. Speaker mounting method: Plastic clamp
Built-in microphone specification	50 Hz - 20 kHz	Power	Power over Ethernet (PoE), IEEE 802.3af Type 1 Class 3 (max 12.95 W)
Amplifier description	Built-in 7 W Class D amplifier	Connectors	RJ45 10BASE-T/100BASE-TX PoE
Digital signal processing	Built-in and pre-configured	Storage	Support for microSD/microSDHC/microSDXC card Max. size 64 GB For SD card recommendations see www.axis.com
Audio management		Reliability	Designed for 24/7 operation.
AXIS Audio Manager Edge	Built in: - Content management for music and live/pre-recorded announcements. - Scheduling to decide when and where to play specific content. - Content prioritization to ensure urgent messages interrupt the schedule. - Zone management allowing you to divide up to 200 speakers into 20 zones. - Health monitoring for remote discovery of system errors. - User management to control who has access to what features. See separate datasheet for more details.	LED indicators	Status LED, front-facing LED
AXIS Audio Manager Pro	For larger and more advanced systems. Sold separately. See separate datasheet for specifications.	Operating conditions	-30 °C to 50 °C (-22 °F to 122 °F) Humidity 10–100 % RH (condensing)
Audio software		Storage conditions	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 5–95 % RH (non-condensing)
Audio streaming	One-way/two-way with optional half-duplex echo cancellation. Mono.	Approvals	EMC CISPR 24, CISPR 35, CISPR 32 Class B, EN 55024, EN 55035, EN 55032 Class B, EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, FCC Part 15 Subpart B Class B, ICES-3(B)/NMB-3(B), KC KN35, KC KN32 Class B, RCM AS/NZS CISPR 32 Class B, VCCI Class B Safety CAN/CSA C22.2 No. 62368-1, CAN/CSA-C22.2 No. 60950-22, IEC/EN 62368-1, KC-Mark, UL 62368-1, UL 60950-22 Environment IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP44
Audio encoding	AAC LC 8/16/32/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Axis μ -law 16 kHz, WAV, MP3 in mono/stereo from 64 kbps to 320 kbps. Constant and variable bit rate. Sampling rate from 8 kHz up to 48 kHz.	Dimensions	Height: 150 mm (5.9 in), \varnothing 215 mm (8.5 in) Ceiling thickness: for mounting: 0–60 mm (0–2.4 in) Dimensions for fixing hole: \varnothing 194 mm \pm 2 mm (7.6 in \pm 0.08 in)
System on chip (SoC)		Weight	2000 g
Model	i.MX 6SoloX	Optional accessories	AXIS TC1603 Tile Bridge (for installation in soft ceiling), AXIS TC1602 Conduit Adapter, AXIS TC1702 Back Cover, AXIS Safety Wire 3M For more accessories, see axis.com
Memory	512 MB RAM, 512 MB Flash	Video management software	AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available on axis.com/techsup/software
Network		Languages	English, German, French, Spanish, Italian
Security	Password protection, IP address filtering, HTTPS ^a encryption, IEEE 802.1X ^a network access control, Digest authentication, User access log, Centralized Certificate Management	Warranty	5-year warranty, see axis.com/warranty
Network protocols	IPv4/v6 ^b , HTTP, HTTPS ^a , SSL/TLS ^a , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, Bonjour, UPnP TM , SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCP, ARP, SOCKS, SSH, NTCIP, SIP (Cisco, Avaya, Asterisk)		
System integration			
Application Programming Interface	Open API for software integration, including VAPIX [®] . One-click cloud connection, AXIS Camera Application Platform (ACAP).		
VoIP	Support for Session Initiation Protocol (SIP) for integration with Voice over IP (VoIP) systems. Peer to peer or integrated with SIP/PBX. Tested with: SIP client such as Cisco, Bria and Grandstream and PBX suppliers such as Cisco and Asterisk. Supported SIP features: secondary SIP server, IPv6, SRTP, SIPS, SIP TLS, DTMF (RFC2976 and RFC2833), NAT (ICE, STUN, TURN) Supported codecs: PCMU, PCMA, opus, L16/16000, L16/8000, speex/8000, speex/16000, G.726-32		

- a. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (www.openssl.org), and cryptographic software written by Eric Young (ey@cryptsoft.com).
b. Audio synchronization with IPv4 only.

Environmental responsibility:
axis.com/environmental-responsibility