

## AXIS W700 Mk II Docking Station 1-bay

AXIS W700 Mk II Docking Station 1-bay enables easy handling of the body worn camera with fast charging, quick, secure and easy data offloading.


- > **Grab and go, ready when you are**
- > **Dock and go, for automatic reliable offloading and fast charging**
- > **Reliable docking connectors**
- > **Splash proof**



# AXIS W700 Mk II Docking Station 1-bay

<b>Network</b>		<b>Supply chain</b>	TAA compliant
<b>Network protocols</b>	IPv4, IPv6 USGv6, HTTPS, mDNS (Bonjour), DNS/DNSv6, NTP, TCP, UDP, ICMP, DHCPv4/v6, ARP	<b>EMC</b>	CISPR 35, CISPR 32 Class B, EN 55032 Class B, EN 55035, EN 61000-6-1, EN 61000-6-2 <b>Australia/New Zealand:</b> RCM AS/NZS CISPR 32 Class B <b>Canada:</b> ICES-3(B)/NMB-3(B) <b>Japan:</b> VCCI Class B <b>USA:</b> FCC Part 15 Subpart B Class B
<b>Throughput</b>	100 Mbit/s	<b>Safety</b>	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1, RCM AS/NZS 62368.1:2022
<b>General</b>		<b>Environment</b>	IEC 60068-2-1, IEC 60068-2-14, IEC 60068-2-2, IEC 60068-2-78
<b>Capacity</b>	1 bay	<b>Network</b>	Compatible with NIST SP500-267 throughput
<b>Casing</b>	Plastic casing Color: black NCS S 9000-N	<b>Sustainability</b>	
<b>Power</b>	5 V DC, max 15 W	<b>Substance control</b>	PVC free RoHS in accordance with EU RoHS Directive 2011/65/EU and EN 63000:2018 REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see <a href="http://echa.europa.eu">echa.europa.eu</a>
<b>Connectors</b>	Network: Shielded RJ45 10BASE-T/100BASE-TX/1000BASE-T Power: DC input Pogo pin pads	<b>Materials</b>	Screened for conflict minerals in accordance with OECD guidelines To read more about sustainability at Axis, go to <a href="http://axis.com/about-axis/sustainability">axis.com/about-axis/sustainability</a>
<b>Operating conditions</b>	Temperature: 0 °C to 40 °C (32 °F to 104 °F) Humidity: 10–85% RH (non-condensing)	<b>Environmental responsibility</b>	<a href="http://axis.com/environmental-responsibility">axis.com/environmental-responsibility</a> Axis Communications is a signatory of the UN Global Compact, read more at <a href="http://unglobalcompact.org">unglobalcompact.org</a>
<b>Storage conditions</b>	Temperature: -40 °C to 65 °C (-40 °F to 149 °F) Humidity: 10–85% RH (non-condensing)		
<b>Dimensions</b>	For the overall product dimensions, see the dimension drawing in this datasheet.		
<b>Weight</b>	133 g (0.29 lb)		
<b>Box content</b>	Docking station, power supply, installation guide		
<b>Warranty</b>	3-year warranty, see <a href="http://axis.com/warranty">axis.com/warranty</a>		
<b>Part numbers</b>	Available at <a href="https://www.axis.com/products/axis-w700-mk-ii-docking-station-1-bay#part-numbers">https://www.axis.com/products/axis-w700-mk-ii-docking-station-1-bay#part-numbers</a>		
<b>Approvals</b>			
<b>Product markings</b> UL/cUL, CE, KC, VCCI, RCM, NOM, WEEE, ICES, FCC			

# Dimension drawing

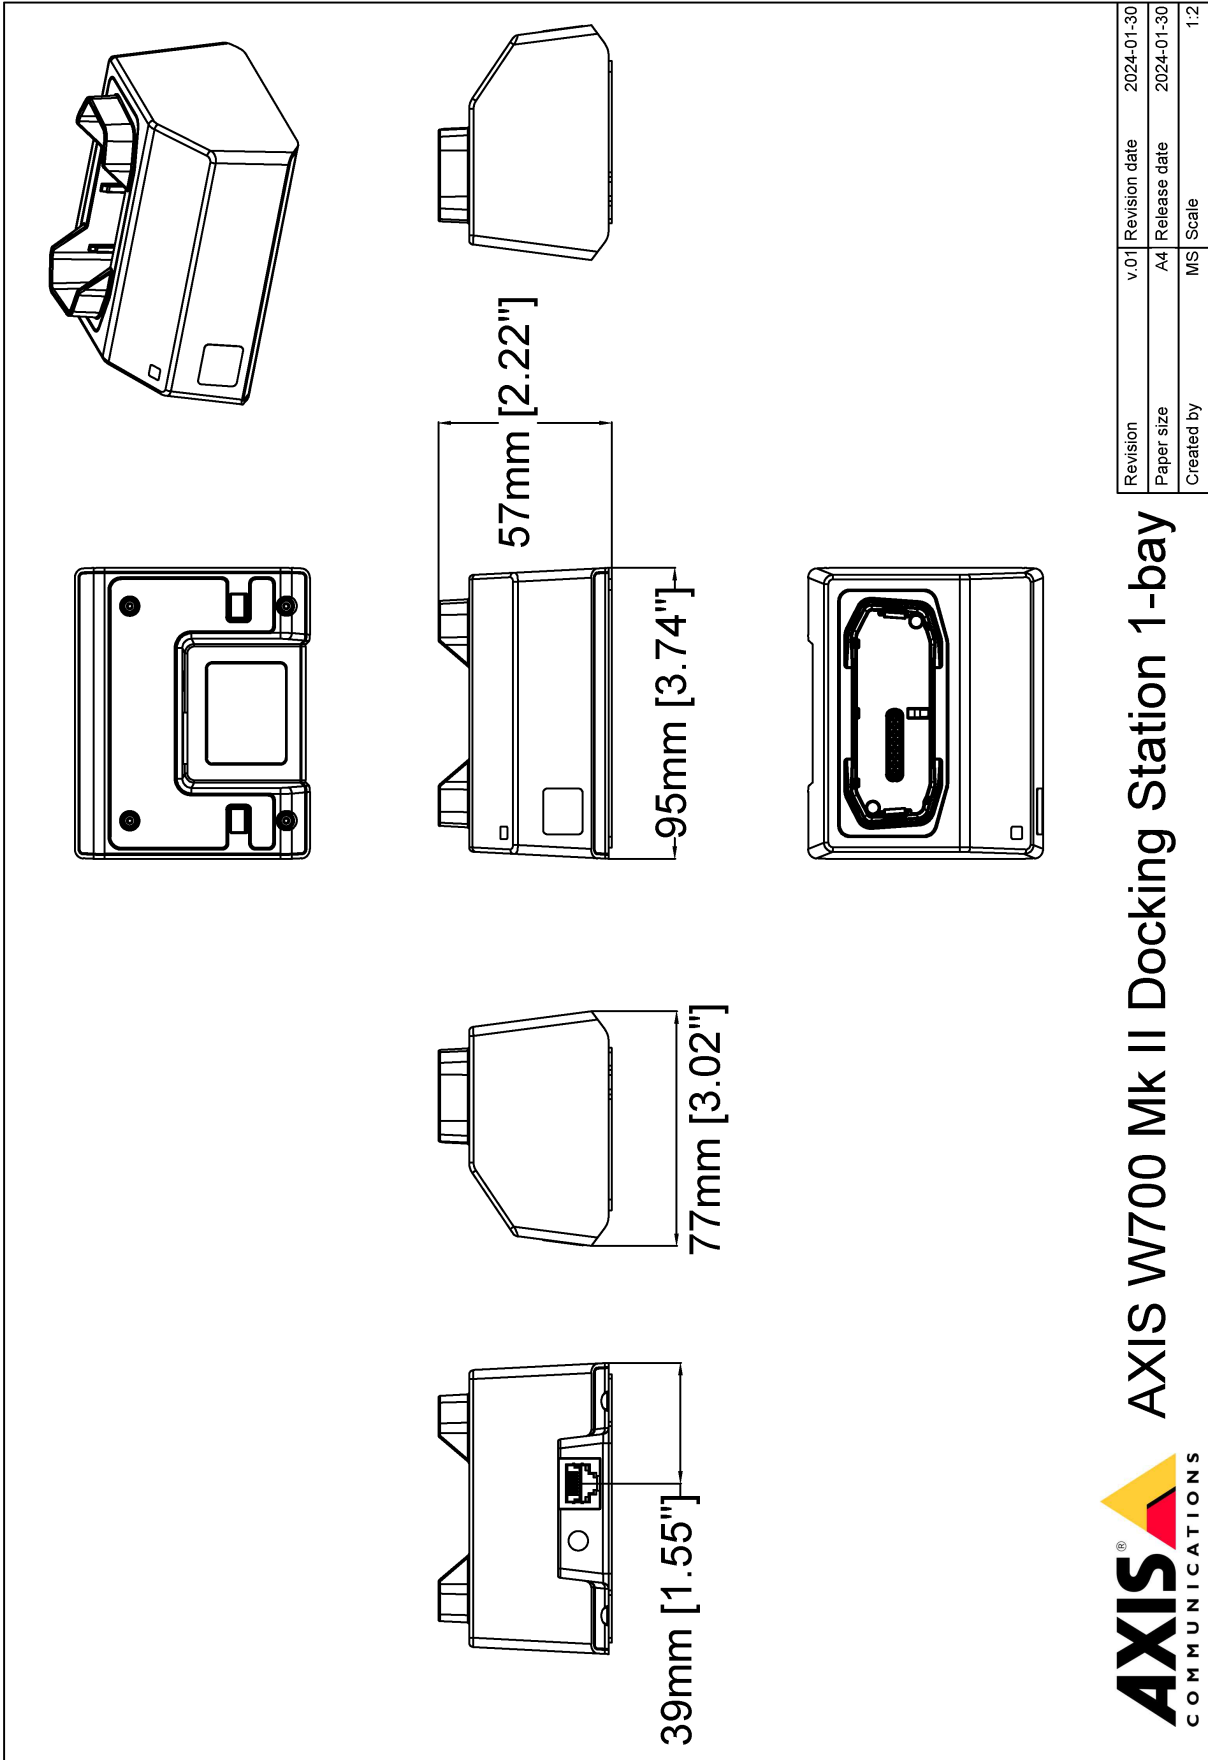

AXIS W700 Mk II Docking Station 1-bay

www.axis.com

