



USB Cat.5 KVM Extender



KVM-9006

H/W Version: 1

The KVM Cat.5 USB Extender Kit is a pair of devices (Transmitter and Receiver) for high-density applications where you want full use of the keyboard, mouse, and monitor, but there is no room for a server nearby.

It allows users to access a computer, server or KVM switch up to 150m away. Or for applications where you want to put all computers in a safe place, all that is needed on the desktop is a single keyboard, monitor, and mouse.

KVM-9006 has auto-adjustable RGB gain/delay control capability for superior video performance. On the local console it supports resolution of up to 1920 x 1440 and on the remote side it supports 1280 x 1024.

This makes KVM cat.5 USB Extender an excellent solution for increase your productivity while helping reduce desktop space.

KVM-9006(Receiver)



1

2

KVM-9006(Transmitter)



1

3



4

5

6

7



4

5

6

7

1. USB2.0 Console
2. Local/Remote LEDs
3. Power/Status LEDs
4. Power Jack
5. RJ-45 Port
6. Console Port
7. Local Host Port

Key Features

- A single, inexpensive Cat.5/5e/6 UTP cable replaces bulky KVM cables
- Locate Cat.5 console up to 150m away from the KVM switch with superior auto-adjust RGB signals capability
- Collocate computers and servers on one location, ideal for hazardous or unsecured environments
- Switch computers by push button or hotkey commands
- Audible feedback when switching
- LED indicators for computer status or data transmission
- 3-in-1 space saving design
- Work with PS/2 or USB computer
- Easy to install and use with plug-and play functionality

Related



KVM-9005
KVM Cat.5 Extender Kit



KVM-9007
KVM Cat.5 Console Receiver

Technical Specifications

KVM-9006 T (Transmitter)

Connector

2 USB2.0 connectors for keyboard and mouse

VGA Connector

2 HDDB 15 connectors

(one for VGA monitor , one for connecting 3-in-1 VGA cables to local computer)

RJ-45

8P8C

LEDs

2 (Power and Status)

Port selection

N/A

Keyboard Emulation

USB2.0

Mouse Emulation

USB2.0

VGA Resolution (Local Host)

1920 x 1440

VGA Resolution (Remote Host)

1280 x 1024

Housing

Metal

Power Adapter

DC 12V, 1A

Operation Temp.

0~50°C

Storage Temp.

-20°C~60°C

Humidity

0~80%, Non-Condensing

Dimension

157.5 x 71.6 x 29mm

Weight (g)

390g

KVM-9006 R (Receiver)

Connector

2 USB connectors for keyboard and mouse

VGA Connector

2 HDDB 15 connectors

(one for VGA monitor , one for connecting 3-in-1 VGA cables to local computer)

RJ-45

8P8C

LEDs

2 (Local and Remote)

Port selection

Hotkey, Push Button

Keyboard Emulation

USB2.0

Mouse Emulation

USB2.0

VGA Resolution (Local Host)

1920 x 1440

VGA Resolution (Remote Host)

1280 x 1024

Housing

Metal

Power Adapter

DC 12V, 1A

Operation Temp.

0~50°C

Storage Temp.

-20°C~60°C

Humidity

0~80%, Non-Condensing

Dimension


157.5 x 71.6 x 29mm

Weight (g)

390g

Product Diagram

You can control the (Remote) site remotely

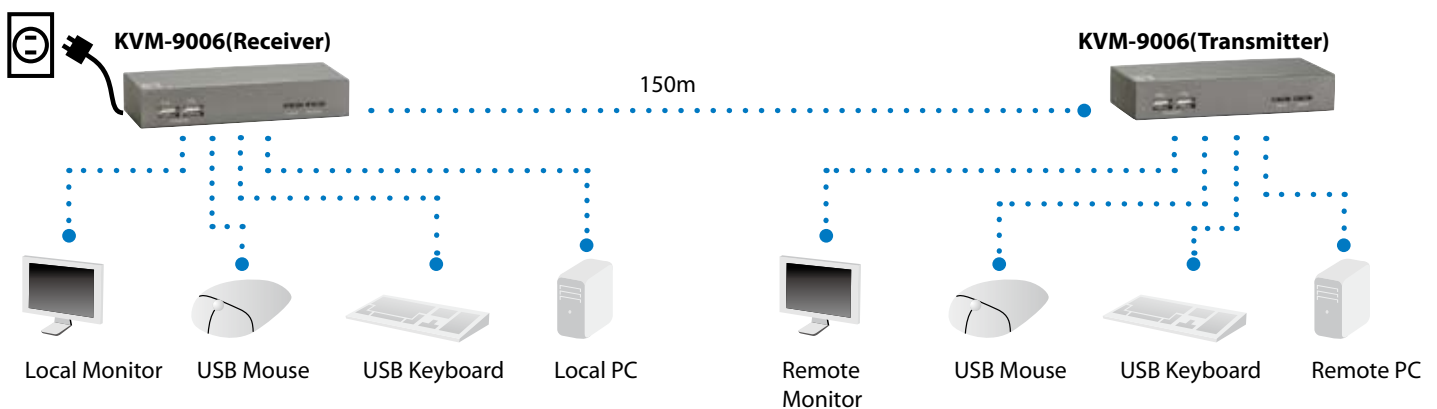

Order Information

Package Contents

KVM-9006: USB Cat.5 KVM Extender

KVM-9006 x1

Power Adapter x2

CD x1

KVM 3-in-1 cable x 2

Footpad x 8

User Manual x1