



POI-3002 Version: 1

## PoE Injector, 30W

The LevelOne POI-3002 is a Power over Ethernet (PoE) injector that not only delivers a cost-effective solution for power distribution, but also provides a seamless way of deploying Powered Devices (PDs) on existing LAN infrastructure.

With the use of power injectors, DC power of up to 30W and the data that comes from a non-PoE switch are merged together and then transmitted to a PD such as a PoE network camera, through the Ethernet cabling. This allows you to extend the use of your existing hardware investment without needing to buy extra PoE switches.

Furthermore, non-PoE devices like wireless access points can also be powered up remotely by adding additional PoE splitters, since power and data are further split into two cables. These devices can therefore be installed in hard-to-reach areas like ceilings where there are no outlets or electrical wiring nearby.



- 1. PoE LED Indicators
- 2. RJ-45 Output Port
- 3. RJ-45 Input Port
- 4. Interlocking Feature

- 5. Power Socket
- 6. Interlocking Feature
- 7. Wall-Mountable

### Key Features

- PoE supplies up to 30W of power feeding on 2 pairs
- Remove the need for a bulky power adapter and power line
- Delivers power and data to equipment via a single Ethernet cable
- Remote power feeding up to 100m
- Unique interlocking feature for easy installation
- Surge protected to enhance safety



- Simple Plug and Play installation
- Compact, lightweight design
- 

---

## Specifications

### System Specifications

#### Standards & Protocols:

IEEE 802.3 10Base-T, Ethernet

IEEE 802.3u 100Base-TX, Fast Ethernet

#### Connectors and Cabling:

1 x 10/100Base-TX RJ-45 Input Port

1 x 10/100Base-TX RJ-45 PoE Output Port

#### Indicator:

Power, PoE

#### Pin Assignment and Polarity:

4/5 (+), 7/8 (-)

#### Power Input:

PoE Power Output: DC 52V / 30W

Unit Output Voltage: DC 52V / 0.6A

Power Requirement: 100-240V AC, 50/60Hz, 0.8A

Power Consumption: 30W (Max.)

### Environment

#### Temperature (°C):

Operating: 0°C ~ 45°C

Storage: 0°C ~ 70°C

#### Humidity (Non-condensing):

Storage: 5% to 95%

Operating: 5 ~ 95%

#### Deployment:

Wall mount

### Physical Specifications

#### Dimensions (W x D x H mm):

87.9 x 51.3 x 166mm

#### Weight (g):


350g

### Approval and Compliance

#### EMI/EMS:

FCC Part 15, CE, RoHS

## Diagram

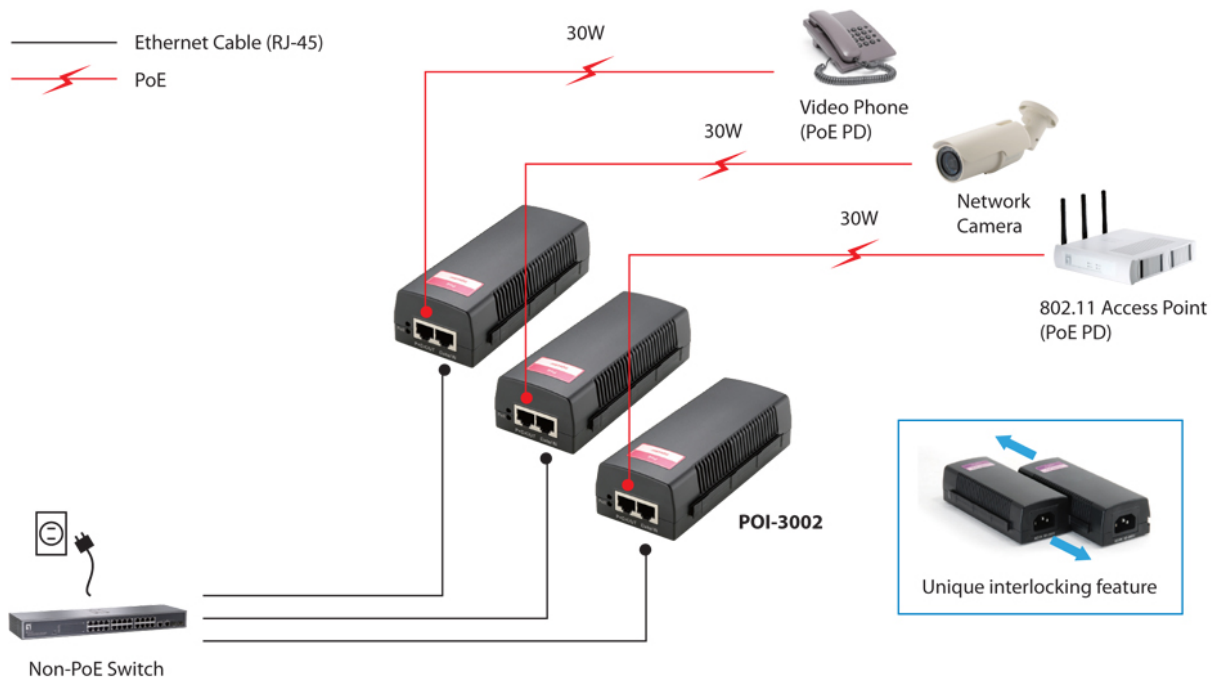

## Order Information

POI-3002

## Package Contents

POI-3002  
Power Cord  
Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.  
Specifications are subject to change without notice.  
All mentioned brand names are registered trademarks and property of their owners.  
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.