



WAP-6117 Version: 1

! Power supply unit is to be ordered separately.

N300 PoE Wireless Access Point, Desktop, Controller Managed

This 802.11n single-band wireless access point can run on PoE, and is a fully managed device (when controlled by LevelOne WAC-2000, WAC-2003). The managed AP is capable of 300 Mbps throughput on the 2.4GHz frequency, and operates on its own or as part of a larger, managed network of access points. PoE means the device does not require an external power supply, making it a versatile and easily deployed option for all sizes of network.

Key Features

- Share your wireless network up to 300Mbps
- Compatible with IEEE 802.11b/g/n wireless standards
- Provides up to 4 SSIDs to separate network traffic and enhance security
- Multi-operation modes to suit different wireless applications
- Supports WEP, WPA and WPA2 encryption with IEEE 802.1x for high level security
- IEEE 802.3af PoE compliant to simplify deployment and installation

Specifications

System Specifications

Standards & Protocols:

IEEE 802.11b/g/n
IEEE 802.3 10-BASE-T, Ethernet
IEEE 802.3u 100-BASE-TX, Fast Ethernet
IEEE 802.11e Wi-Fi Multimedia (WMM)
IEEE 802.3x Ethernet Flow Control
IEEE 802.11i Wi-Fi Protected Access (WPA2)
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, Wireless Networking
IEEE 802.3af

Port:

1*10/100 Mbps WAN Port(PoE)
4*10/100 Mbps LAN Port
1*USB Port
1*DC Jack

Button/Knob:

WPS button

**Indicator:**

Power, WLAN

Power Input:

PoE (IEEE 802.3af) 48 VDC on WAN port
12VDC / 1.5A (optional Power Adapter)

Power Consumption:

< 12W

Wireless

Operating Mode:

Gateway

Wireless AP

WiFi Repeater

WISP

Encryption:

WEP Encryption-64/128/152 bit

WPA/WPA2 Personal (WPA-PSK using TKIP or AES)

WPA/WPA2 Enterprise (WPA-EAP using TKIP)

Receive Sensitivity(dBm):

802.11n:Range (-68) dBm

802.11g:6Mbps: Range (-90) dBm

802.11g:54Mbps: Range (-72) dBm

802.11b:1Mbps: Range (-95) dBm

802.11b:11Mbps: Range (-90) dBm

Wireless Channels:

Ch.1 ~ 11 USA

Ch.1 ~ 13 EU

EIRP(dBm):

2.4 GHz Radio: EIRP < 20dBm

Antenna:

2*2.4G Omni 5dBi detachable antenna

Frequency Band:

2.4 ~ 2.4835 GHz

Modulation:

OFDM = BPSK,QPSK, 16-QAM, 64-QAM; DSSS = DBPSK, DQPSK, CCK

Data Transfer Rate:

802.11n: 300 ~ 78 Mbps

802.11g: 54 ~ 6 Mbps

802.11b: 11 ~ 1 Mbps

Features

General:

Multi-SSID: 2.4GHz, 4 SSID

PoE:

IEEE 802.3 af/at

Security:

SSID Broadcast On/Off

Management:

Web-Based GUI Configuration

QoS:

802.11e WMM Supported

Ease of Use:

Web-based GUI with Quick Installation Wizard

Web-based (HTTP) firmware upgrade

Performance**Number of Clients:**

Maximum:40

Recommend:30

Environment**Operating Temperature (°C):**

Operating: 0°C ~ 55°C

Storage: -40°C ~ 70°C

Operating Humidity (Non-condensing):

5%~95% Typical

Installation:

Desktop

Physical Specifications**Dimensions (W x D x H mm):**

220*135*30 mm

Diameter:

217mm X136mm X 24mm

Weight (g):


870

Approval and Compliance**EMI/EMS:**

CE



Diagram

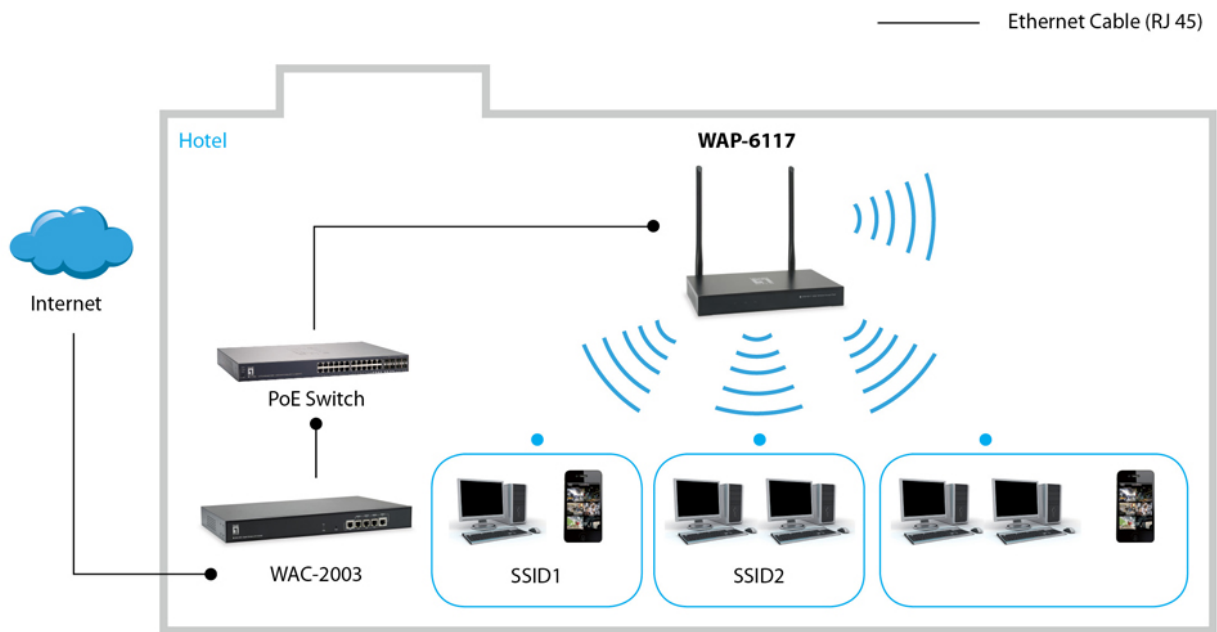

Order Information

WAP-6117

Package Contents

WAP-6117
Resource CD (User Manual, QIG)
RJ45 Network Cable

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.