

# RG-RAP6260(H)-D

## Wi-Fi 6 AX6000 High-density Directional Outdoor Access Point

DATASHEET



### Highlights

- Ultra-fast 5.95Gbps directional outdoor AP, best-in-class Wi-Fi performance.
- Boost your Internet speed with 2.5GE uplink.
- Easily expand extra outdoor Wi-Fi with Reyee Mesh.
- Extra-distance access point deployment with SFP port.
- IP68 protection, rock-solid in harsh environments.

## Highlight Features

### Build Ultra-fast and High-density Outdoor Wi-Fi 6



Wi-Fi 6  
AX6000



High Density  
Access



2.5GE Port  
SFP Port



Reyee Mesh  
Technology



Free Cloud  
Management

### Best-in-class Wi-Fi Performance

With a revolutionary combination of **OFDMA** and **1024QAM**, the latest **802.11ax** standard, the **160MHz** band, and dual band **4x4 MU-MIMO**, RG-RAP6260(H) wireless aggregation rate reaches 5.95Gbps.



RG-RAP6260(H)

5951 Mbps

RG-RAP6260(G)

1775 Mbps

Wi-Fi 6  
AX6000

## / Highlight Features


### Easily Add Extra Outdoor Wi-Fi with Reyee Mesh

Less wiring, more relaxing



### Support Extra-Distance Access Point Deployment


With **gigabit SFP** port, the device supports up to **20km** transmission from datacenter with single mode fiber

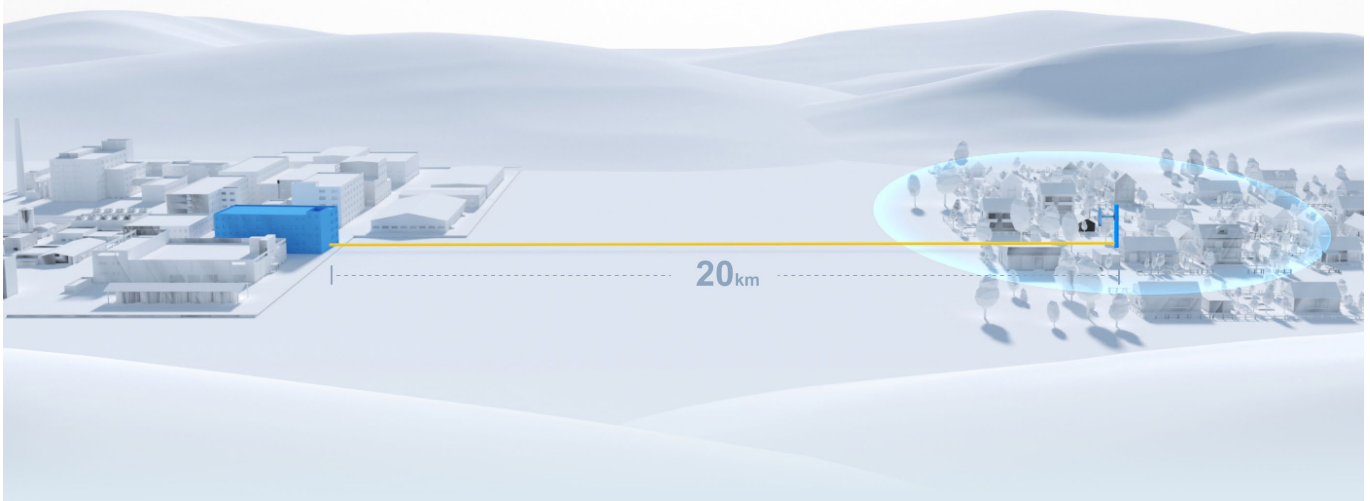



## Highlight Features

### Boost Your Internet Speed with 2.5Gbps Uplink

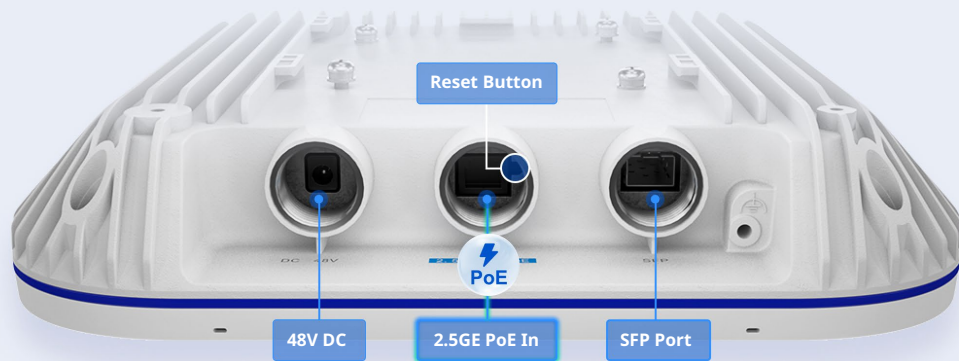

### Rock-solid in Harsh Environments

Adopts completely sealed, waterproof, dustproof, moisture proof and flame-retardant, wind erosion protection, wide temperature range, and 4kV surge protection design.



IP68 Protection

4kV Lighting Protection


WiFi 6 AX Wind Erosion Protection

-40°C ~ 65°C Flame-Retardant

# Highlight Features

## Directional Coverage with Long Range

Built-in high gain antennas, supports full coverage.

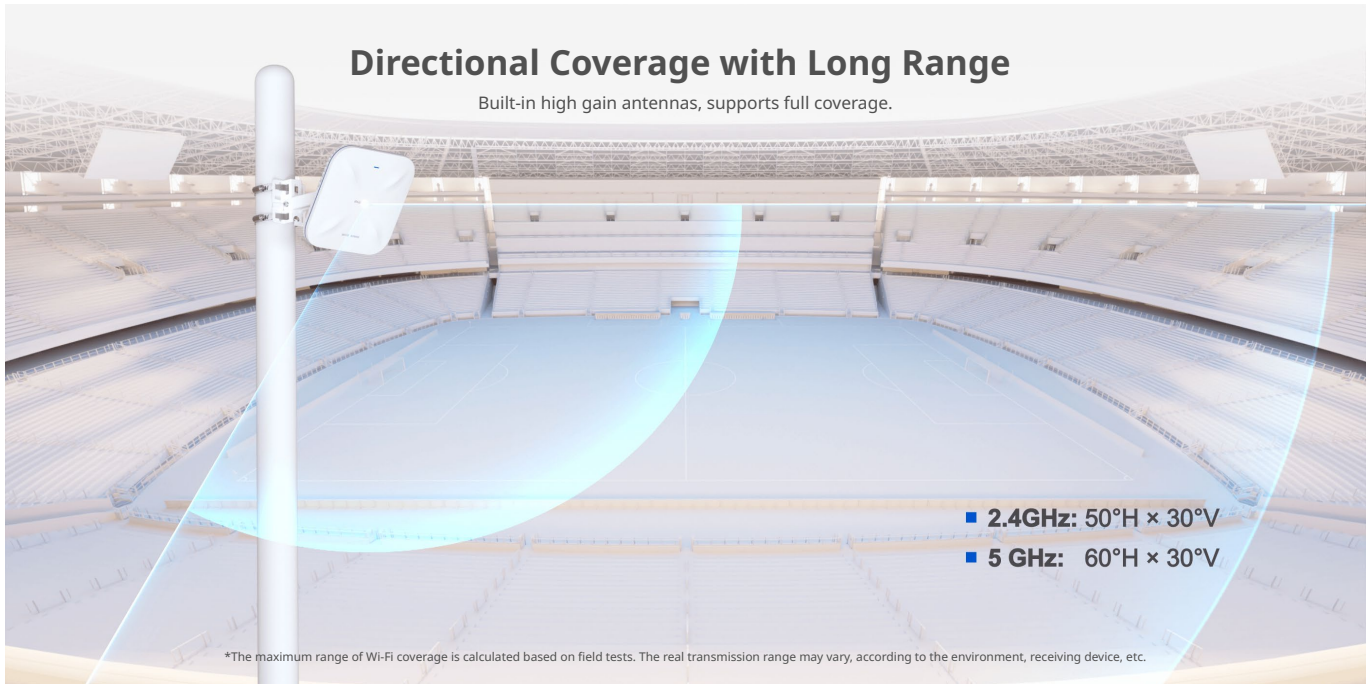


- 2.4GHz: 50°H × 30°V
- 5 GHz: 60°H × 30°V

\*The maximum range of Wi-Fi coverage is calculated based on field tests. The real transmission range may vary, according to the environment, receiving device, etc.

## Cloud, Make Your Business Easy

- Remote monitoring
- Remote Wi-Fi management
- Cloud portal authentication
- Wireless intelligent optimization

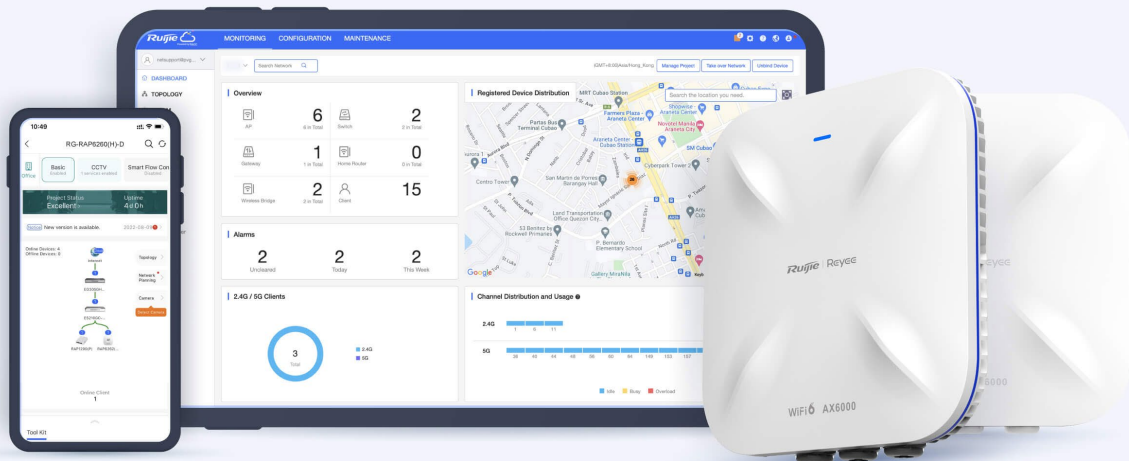

# Specifications

## Basic Feature

Wi-Fi Standards	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave 2) Wi-Fi 4 (IEEE 802.11n) IEEE 802.11a IEEE 802.11b/g
MIMO	2.4GHz, 4x4, MU-MIMO 5GHz, 4x4, MU-MIMO
Max. Wi-Fi Speed	2.4GHz: 1148Mbps 5GHz: 4804Mbps
Antenna	8
Antenna Type	Built-In directional
Antenna Gain	2.4GHz: 10dBi 5 GHz: 9dBi
Transmit Power	Frequency bands using and the max EIRP: Note: Country specific restrictions apply <b>European Union &amp; United Kingdom</b> 2400-2483.5 MHz, EIRP ≤ 20 dBm 5470-5725 MHz, EIRP ≤ 30 dBm <b>United States:</b> 2400-2483.5 MHz, max output power ≤ 30dBm & EIRP ≤ 36 dBm 5150-5250 MHz, max output power ≤ 30dBm & EIRP ≤ 36 dBm 5250-5350 MHz, max output power < 24dBm & EIRP ≤ 30 dBm 5470-5725 MHz, max output power < 24dBm & EIRP ≤ 30 dBm 5725-5825 MHz, max output power ≤ 30dBm & EIRP ≤ 36 dBm <b>Myanmar :</b> 2400-2483.5 MHz, EIRP ≤ 23 dBm 5725-5825 MHz, EIRP ≤ 30 dBm <b>Thailand:</b> 2.4 GHz to 2.4835 GHz: 20 dBm 5.470 GHz to 5.725 GHz: 30 dBm 5.725 GHz to 5.825 GHz: 30 dBm <b>Indonesia:</b> 2400-2483.5MHz, EIRP ≤ 36 dBm 5725-5825MHz, EIRP ≤ 36 dBm <b>Egypt:</b> 2400-2483.5 MHz, EIRP ≤ 20 dBm 5150-5350 MHz, EIRP ≤ 23 dBm"
Fixed Ports	1 x 100/1000/2500 Base-T port 1 x 1GBase-X SFP port 1 x DC port 1 × Reset button

# Specifications

## Basic Feature

Max. Clients	512
Recommended Clients	130
Max. SSIDs	8
Recommended Wi-Fi Coverage Radius	2.4GHz: 50 meters 5GHz: 150 meters The Wi-Fi coverage is related to the installation environment of the access point.
Max. Wi-Fi Coverage Radius	1 km
Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.4835 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz country-specific restrictions apply

## Software Feature

### WLAN Basic Features

Power Adjustment	✓
Frequency Bandwidth	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80/160 MHz
Roaming	Layer 2 roaming Layer 3 roaming 802.11k/v/r
OFDMA	✓
Beamforming	✓
WMM	✓
Radar Signal Detection and Frequency Hopping(DFS)	✓
<b>WLAN Security</b>	
Wi-Fi Password	16 Digits
Security Mode	WPA-PSK, WPA2-PSK, WPA/WPA2-PSK
Blacklist and Whitelist	✓

# Specifications

Software Feature	
Enhanced User Experience	
Wi-Fi Optimization	✓
STA Limit	✓
Removing Low-RSSI STAs	✓
Adjusting Sending Rate of Beacon and Probe Response	✓
Syslog Recording Why Users Lose Connection	✓
Auto Channel and Power Adjustment on Cloud	✓
RSSI Threshold for STA Access	✓
Load Balancing	✓
Networks	
Network Access Mode	PPPoE Client DHCP Client Static IP
VLAN	✓
DHCP Server	✓
System	
Cloud Management	✓
APP Management	✓
APP Upgrade	✓
APP Restart	✓
Scheduled Restart	✓
Default Access/Password	10.44.77.254 The factory status password: admin
Local Upgrade	✓



# Specifications

## System

Online Upgrade	✓
Dual-bin Backup	✓
Factory Reset	✓
Language	Chinese English
System Log	✓
Diagnostics	✓
Network Check	✓

## Physical

LED Indicator	1 × System LED indicator
Buttons	1 × Reset button
Dimensions (W × D × H)	298 mm x 298 mm x 65 mm (Without Mounting Bracket)
Weight	Main Unit: 3.5 kg Mounting Bracket: 1.35kg
DC Port Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 10 mm
Installation	Wall-Mountable/Pole-Mountable
Mounting Bracket Dimensions (W × D × H)	124 mm x 120 mm x 35 mm
Mounting Hole Pattern	65 mm x 105 mm
Mounting Hole Diameter	9 mm
Pole Diameter	70 mm to 140 mm
Power Supplies	IEEE 802.3bt PoE DC 48V/1A
Power Consumption	≤ 40W
PoE Power Budget	NA

# Specifications

## Physical

### Environmental

Operating Temperature -40°C ~ 65°C

Storage Temperature -40°C ~ 85°C

Operating Humidity 0% to 100% Noncondensing

Storage Humidity 0% to 100% Noncondensing




IP(Ingress Protection) IP68

Port Surge 4kV




MTBF >400000H

# Antenna Schematic

2.4GHz

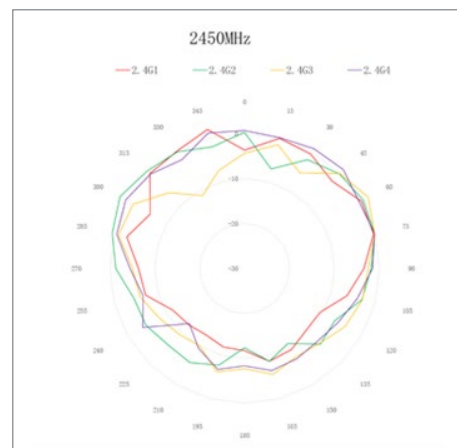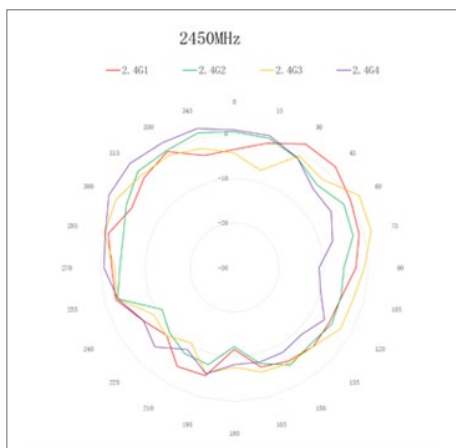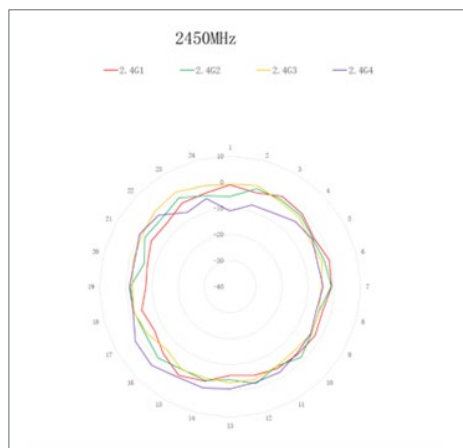

5GHz

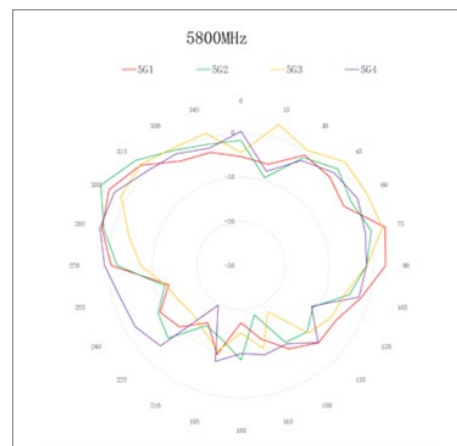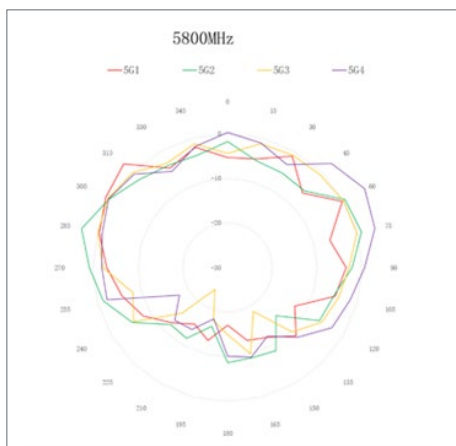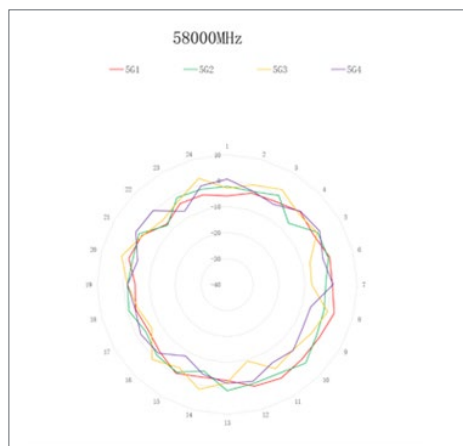

## Package Contents

Package Information	RG-RAP6260(H)-D
Access Point	1
Hose Clamp	2
Mounting Plate	1
M8 x 20 Screws	4
M8 x 60 Expansion Anchors	4
Cable Gland for SFP Port	1
Cable Gland for Ethernet Port (Pre-installed on the access point)	1
SFP Port Plug (Pre-installed on the access point)	1
Mounting Arm	1
DC Connector Plug (Pre-installed on the access point)	1
Cable Gland for DC Connector	1
Grounding Cable	1
User Manual	1
Package Weight	5.47 kg
Package Dimension (w x d x h)	395 mm x 395 mm x 197 mm

**Ruijie | Rcycc**

 **Redefine your easy network**

---

Copyright ©2000-2023 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

**Notice**

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.  
Building 19, Juyuanzhou Industrial Park, No.618 Jinshan  
Road, Cangshan District, Fuzhou, Fujian, China  
Website: <https://www.ruijienetworks.com>