

DS-D60C-B

Information Distribution Box



Main Features

- **Variable Materials**

Supports static and dynamic materials, including the application, pictures, audio, video, PDF, streaming media, webpage, live video, third-party data, etc.

- **Flexible Program Schedule**

- Supports free schedule and district display of multiple materials.
- Supports variable display modes: display by day, display by week, custom display, etc.

- **Centralized Management**

Remotely control and manage one or more screens, such as timed startup/shutdown, timed brightness/volume, and screenshot previewing.

- **Organization Feature**

5-level organization is available for managing materials, programs, terminals, and users.

- **Multilevel User Permission**

Supports creating custom users, and allocating permission for users according to user level.

- **Multiple Security Safeguards**

- 3-level check of materials, programs, and schedules to prevent mistake release.
- Screensaver to secure safe for broadcast contents.
- Encryption of data storage and transmission to avoid data tampering.

- **Arbitrary Direction Remote Control**


The remote control, adopting wireless communication in 433 MHz, can control the information distribution box in arbitrary direction.




Specifications

Model	DS-D60C-B	
Resolution	1920x1080p@30Hz, 1920x1080p@50Hz, 1920x1080p@60Hz, 1280x720p@30Hz, 1280x720p@50Hz, 1280x720p@60Hz, 3840x2160p@30Hz, 3840x2160p@50Hz, 3840x2160p@50Hz (YCbCr420), 3840x2160p@60Hz, 3840x2160p@50Hz (YCbCr420)	
Material	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, FLV, WEBM, WMV, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG	
Echo cancellation	No	
Interface	HDMI OUT	1-ch
	AUDIO IN	1-ch
	AUDIO OUT	1-ch
	LAN	1
	USB	2 x USB 2.0 interface
	TF Card Slot	1
Power	12 VAC, 2 A	
Working consumption	≤ 20 W	
Standby consumption	≤ 1 W	
Working temperature	0 °C to 50 °C (32 °F to 122 °F)	
Working humidity	10 % to 90 %	
Wired network	1000 M/100 M self-adaptive	
Wireless network	Wi-Fi 802.11b/g/n	
Bluetooth	Bluetooth 4.0	
Dimension	Without package	145 mm x 145 mm x 31.89 mm (5.7" x 5.7" x 1.3")
	With package	188 mm x 176 mm x 101 mm (7.4" x 6.9" x 4.0")
Weight	Net weight	0.6 kg (1.3 lb.)
	Rough weight	0.65 kg (1.4 lb.)
Built-in system	Chip	RK 3288
	CPU	4-core Cortex-A17
	GPU	Mali T764
	Operating memory	2 GB
	Internal memory	8 GB (EMMC), TF Card 32 GB
	Operating system	Android 6.0.1
Accessory	Power Adaptor, Battery, Remote Control, CD-ROM	

Appearance

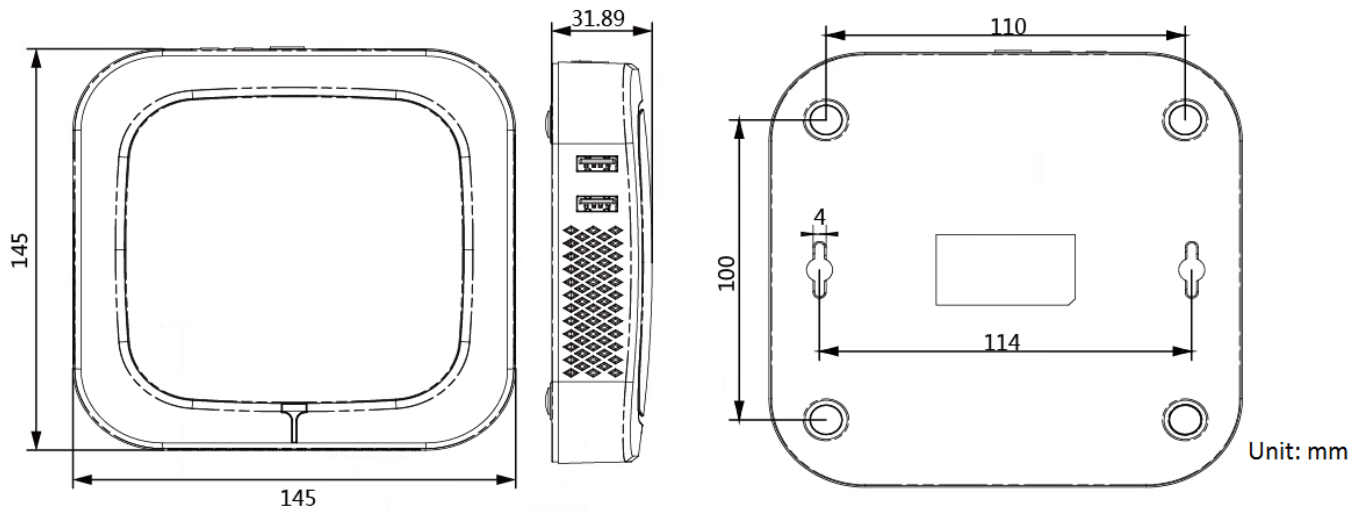

Physical Interfaces

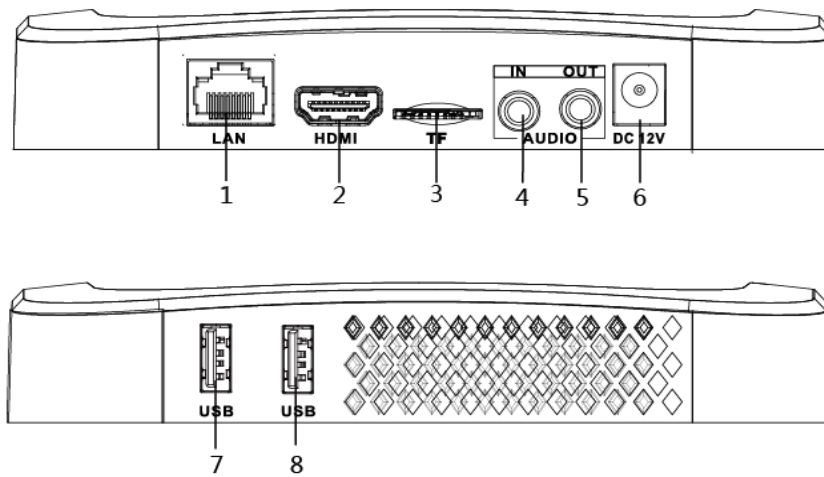

No.	Interface	Description
1	LAN	Network interface
2	HDMI	HDMI video output interface
3	TF	TF card slot
4	AUDIO IN	Audio input
5	AUDIO OUT	Audio output
6	DC 12V	Power interface
7	USB	USB 2.0 interface
8	USB	USB 2.0 interface

Available Model

DS-D60C-B

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com