

## iDS-2CD6810F/C

### Indoor Dual-Lens People Counting Camera



## smart IPC

iDS-2CD6810F/C is a specialized people counting camera, supporting separate counting of people entering, exiting, and passing by.

The camera combines various crucial and advanced technologies, including binocular stereo vision, 3D people detection and tracking, and height filtering, to guarantee high accuracy.

- 1/3" Progressive Scan CMOS
- Dual lens, dual CPU, support stereo views
- 2 mm/2.8 mm/4 mm lens, optional
- Max. resolution 640 × 960
- H.264
- Flash memory storing people counting data
- 3D digital noise reduction
- 12 VDC/PoE



## Specifications




<b>Camera</b>	
Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	1/25 s – 1/10,000 s
Auto-iris	Manual
Digital Noise Reduction	3D DNR
<b>Lens</b>	
Focal length	2 mm, 2.8 mm, 4 mm, optional
Aperture	2 mm: F2.2 2.8 mm: F2.0 4 mm: F2.2
FOV	2 mm: horizontal FOV 105°, vertical FOV 89° 2.8 mm: horizontal FOV 83°, vertical FOV 68° 4 mm: horizontal FOV 63°, vertical FOV 55°
Lens Mount	M12
<b>Compression Standard</b>	
Video Compression	Main stream: H.264 Sub-stream: H.264
H.264 Type	Baseline Profile/Main Profile
Video Bit Rate	32 Kbps to 8 Mbps
<b>People Counting</b>	
Statistics	Support separate counting of people entering, exiting, and passing by
Data Uploading	Support real-time uploading and uploading by statistic cycle
Email Report	Daily, weekly, monthly, and annual report supported
Height Filter	Support
<b>Image</b>	
Max. Resolution	640 × 960
Main Stream Max. Frame Rate	50Hz: 25fps (640 × 480) 60Hz: 24fps (640 × 480)
Sub-stream Max. Frame Rate	50Hz: 25fps (640 × 960) 60Hz: 24fps (640 × 960)
Image Enhancement	3D DNR
Image Setting	Brightness and sharpness are adjustable by client software or web browser
<b>Network</b>	
Alarm Trigger	Video tampering, alarm input, alarm output, network disconnected, IP address conflict, illegal login
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
General Function	One-key reset, anti-flicker, heartbeat, password protection, watermark
API	ISAPI, HTTP
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users 3 levels: Administrator, Operator and User
Client	iVMS-4200
Web Browser	IE8+, Chrome31-44, Firefox 30.0 - 51
<b>Interface</b>	

Communication Interface	1 RJ45 10M/100M Ethernet port 1 RS-485 interface
Alarm	1 input, 1 output (up to 12 VDC, 30 mA)
Reset Button	Yes
<b>General</b>	
Operating Conditions	-10 °C to +40 °C (+14 °F to +104 °F), humidity 95% or less, no condensing
Power Supply	12 VDC ± 25%, 5.5 mm coaxial power plug PoE (802.3af, class 3)
Power Consumption and Current	12 VDC, max. 5 W, 0.42 A PoE(802.3af 36 V to 57 V) , max. 7 W, 0.2 A to 0.13 A
Material	Base: metal; cover: plastic
Dimensions	Camera: 194 × 70.2 × 35.8 mm (7.64" × 2.76" × 1.4") Package: 225 × 125 × 76 mm (8.86" × 4.92" × 2.99")
Weight	Approx. 300 g (0.66 lb), 480 g (1.06 lb) with package

## Available Models:

iDS-2CD6810F/C (2.0 mm), iDS-2CD6810F/C (2.8 mm), iDS-2CD6810F/C (4 mm)

## Dimensions

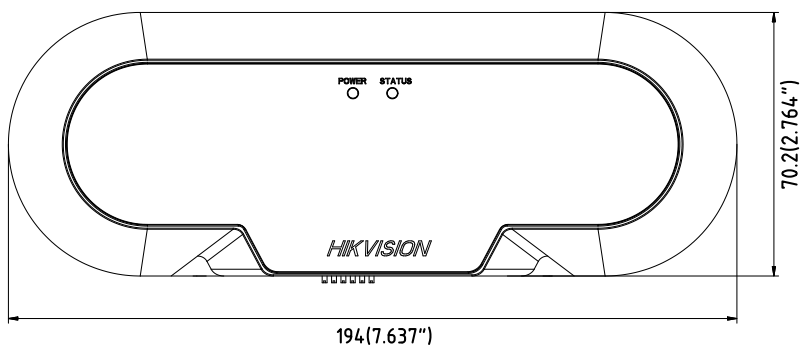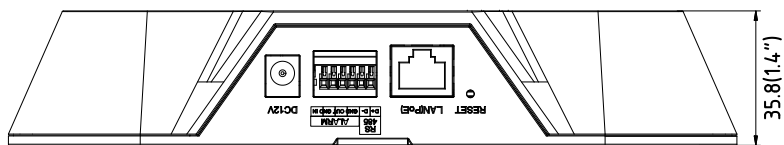

Unit: mm

## Accessories



DS-2102ZJ  
Wall mount



DS-1227ZJ-P1  
In-ceiling mount



DS-1299ZJ  
Pendant mount

## Installation Recommendation

Following table shows the relations among focal length, mounting height, and max. detection span of typical values. For detailed installation advice, please contact the technical support of HIKVISION.

Focal Length (mm)	Mounting Height (m)	Max. Detection Span (m)
2.0	2.5	1.8
2.0	3.0	2.9
2.0	3.5	4.0
2.0	4.0	5.2
2.8	4.1	4.1
2.8	4.5	4.8
4.0	4.6	3.5
4.0	5.0	4.0
4.0	5.5	4.6
4.0	6.0	5.2

Note: Mounting height of 2.0 mm lens camera should be no higher than 4 meters. Mounting height of 2.8 mm lens camera should be no higher than 4.5 meters.

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com