

## DS-D6022FN-B

### Indoor Wall-Mounted Digital Signage



The digital signage is used to broadcast information, release news, advertise products, etc., which is widely applicable to industry of entertainment, finance, traffic, etc.

- Plastic shell appearance, slim frame, and all-in-one design.
- Exquisite image, industrial A+ panel, auto-coloring and image-enhancing engine.
- Variable materials, static and dynamic materials, including the pictures, audio, video, scrolling subtitle, PDF, webpages, live video, number calling, pop-up pictures, etc.
- Flexible program schedule, free schedules and district play of multiple materials and variable play modes: play by day, play by week, play by loop, custom play, etc.
- Centralized management, remotely control and manage one screen or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview, remotely release programs and updates local (USB) programs.
- Organization permission, 5-level organization is available for managing materials, programs, terminals, and users, and support creating custom users, allocating permission for users according to user level, and permission templates.
- Multiple security safeguards, 3-level check of materials, programs and schedules to prevent mistake release, encryption of data in storage and transmission to prevent data tampering, and with no default password, users can activate and set initial password to guarantee the password safety.

## Specification


	Model	DS-D6022FN-B
<b>Display</b>	Viewing Angle	178° (H)/178° (V)
	Contrast Ratio	3000:1
	Screen Size	21.5 inch
	Active Display Area	478.656 mm (H) × 260.28 mm (V)
	Backlight	ELED
	Pixel Pitch	0.24795 (H) mm × 0.24795 (V) mm
	Resolution	1920 × 1080@60 Hz
	Brightness	250 cd/m <sup>2</sup>
	Color Depth	8 bit, 16.7 M
	Response Time	6.5 ms
	Color Gamut	72% NTSC
	Reliability	7 × 24 h
	Refresh Rate	60 Hz
<b>Built-in System</b>	Operation System	Android 8.1.0
	CPU	Cortex-A17, 4-core, main frequency 1.6 GHZ
	Memory	2 GB
	Built-in Storage	16 GB
<b>Interface</b>	Video & Audio Input	AUDIO IN × 1
	Video & Audio Output	AUDIO OUT × 1
	Network Interface	LAN × 1, Wi-Fi
	Data Transmission Interface	USB 2.0 × 2, TF Card × 1, BT 4.0 × 2, Wi-Fi
<b>Internal Function</b>	Loudspeaker	2 × built-in speaker, 8 Ω 5 W
<b>Power</b>	Standby Consumption	≤ 10 W
	Input Voltage	100 to 240 VAC, 50/60 ± 3 Hz
	Power Consumption	≤ 40 W
<b>Working Environment</b>	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% to 90% RH
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	5% to 90% RH
<b>General</b>	Material Type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Mounting Type	Wall-Mounted
	Product Dimensions (W × H × D)	492.36 (W) × 289.68 (H) × 41.88 (D) mm (without wall-mounted backboard) (20.34" × 12.60" × 1.83") 492.36 (W) × 289.68 (H) × 41.88 (D) mm (with wall-mounted backboard) (20.34" × 12.60" × 2.11")
	Package Dimensions (W × H × D)	593 (W) × 434 (H) × 157 (D) mm (23.35" × 17.09" × 6.18")
	Net weight	3.03 kg (6.68 lb.)
	Gross weight	4.63 kg (10.21 lb.)

	Packing List	Wall-mounted backboard × 1, screws M3 × 6, power cord × 1, remote control × 1, battery × 2, screw package × 1
--	--------------	---

**▪ Available Model**

DS-D6022FN-B

▪ **Dimension**

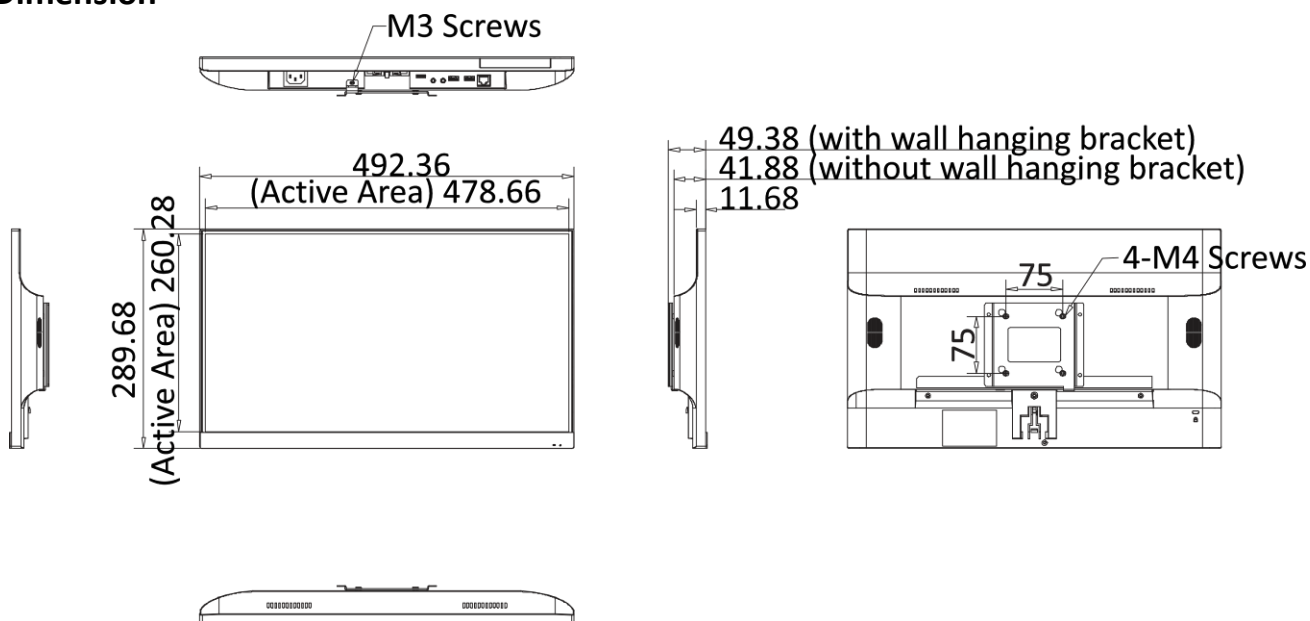

Unit: mm

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

