

## DS-1105KI Network Keyboard

Hikvision DS-1105KI network keyboard adopts 7" touchscreen and 4D joystick. It supports accessing Hikvision DVR, DVS, NVR, decoder, MVC, network camera, network speed dome, HikCentral and KPS platforms via network. It can be applied to industries like financial, education, communication, public security industries.



### Available Model

DS-1105KI

### Key Feature

#### Video Wall Operation

- Divide video wall into regions to manage video wall by region
- open/close window, move window, resize window, divide window, and enlarge/narrow sub-window.
- Group and macro

#### Live View

- Preview camera live image on network keyboard touchscreen
- Quickly switch to the previous/next camera
- Optical and mechanical keyboard switches provide comfortable feelings and stable performance
- Up to 4-ch live view

#### PTZ Control

- Control speed dome movement via joystick

#### Playback

- Play the decoder videos on video wall
- Play the video recorder videos on network keyboard touchscreen. Supports clipping and capturing during playback

#### Integration

- Add devices via SDK or ONVIF protocol
- HikCentral and KPS platforms access

#### Capability


- Support up to 32 users (1 administrator and 31 operators) and 4,000 devices
- Add/modify/delete cameras in batch
- Import/export configuration file



## Specification


<b>Model</b>		<b>DS-1105KI</b>
Local Decoding	Format	H.264, H.265, MPEG4
	Performance	4@1080p
	Screen division	Single screen
Input/output	Display	7" TFT LCD at 1024 × 600 resolution
	Joystick	4D joystick
	Audio	1-ch MIC IN, supports 48 VDC phantom power supply; 1-ch LINE OUT, 3.5 mm stereo plug, supports two-way audio
	Video	1 × HDMI Interface; 1 × VGA Interface
	USB	1 × USB 2.0 interface
	Serial port	1 × RS-232, 1 × RS-485
	Network	1 × 100M/1000M self-adaptive network interface
General	System	Linux
	Dimensions (L × W × H)	435 × 193 × 110 mm (17.1" × 7.6" × 4.3")
	Weight	2 KG (4.4 lb)
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)
	Working humidity	10% to 90%
	Power supply	12 VDC
	Consumption	≤ 15 W

## Physical Interface

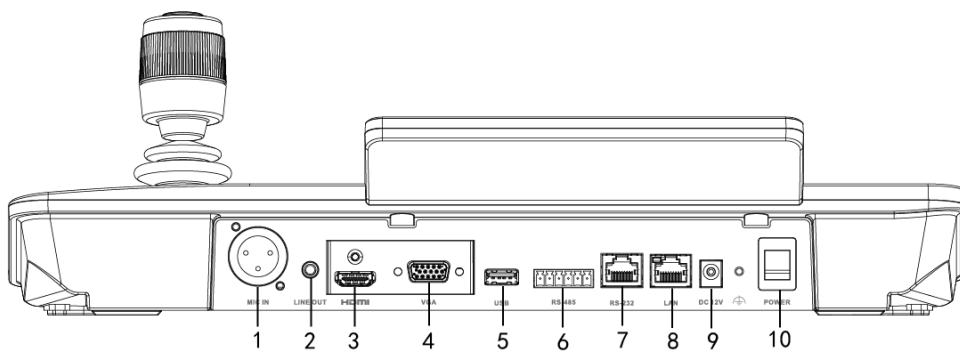

No.	Description	No.	Description
1	Microphone Input	2	Audio Output
3	HDMI Interface	4	VGA Interface
5	USB Interface	6	RS-485 Interface
7	RS-232 Interface	8	Network Interface
9	12 VDC Power Supply	10	Power Switch

## Typical Application

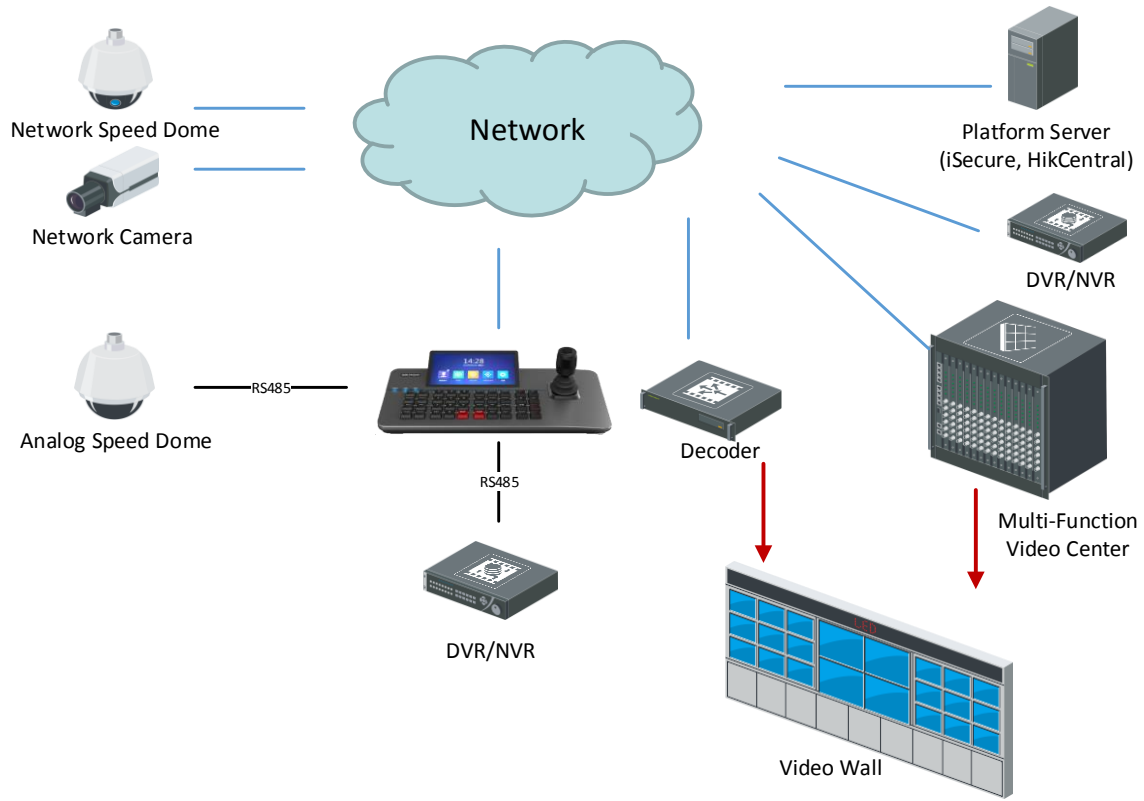

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 [216]521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com