

Husky IVO 350T

Freedom to scale up


Throughput

Up to 360 Mbit/s

Local storage

Up to 32 TB

The Husky IVO 350 Tower is the ideal choice for those wanting to start small in their video installation while having the flexibility to grow – without a heavy investment in IT resources and rack space.

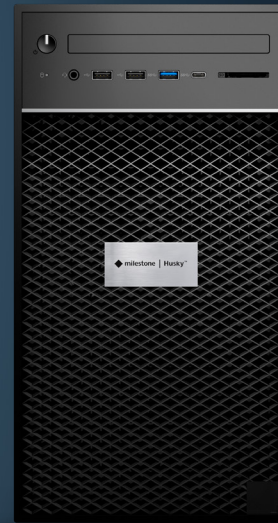

5 YEARS WARRANTY

Easy & flexible setup

With an easy setup and flexibility in your XProtect® VMS, this unit is a great fit to get you started with your video installation.

- Easy setup with the Husky Assistant in a few simple steps
- Windows and XProtect VMS optimization according to your needs
- Choose any version of XProtect VMS for your installation
- Extended camera compatibility — connect more than 10,000 devices to your XProtect VMS

Peace of mind – now and long into the future

Your video installation should not only be easy and flexible to set up, but also to manage and run – without extra costs or complexity. With the Husky IVO 350T, you get our standard five-year warranty, with single-point support through Milestone and all the benefits of using XProtect as your VMS.


- Single point of contact for support of both the VMS and the appliances
- Possibility for onsite support interventions for hardware repairs and replacement

Key features

- Desktop tower form factor – ideal for locations with limited space or no rack
- Up to 32TB raw video storage
- Software RAID for increased uptime

Recommended usage

- Up to 50 channels (Based on the following video stream: 1080p, 30 FPS, 5-8 Mbit/s/channel, with video motion detection recording)
- Local live view/playback possible for up to 4 channels through XProtect Smart Client, without affecting the overall performance

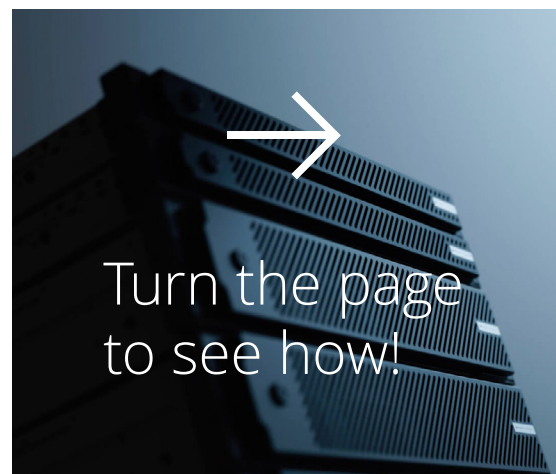

Turn the page to see how!

Hardware information

Form Factor

Desktop Tower Form Factor

CPU

Intel® Core™ i3-10100

GPU

Integrated Intel® UHD Graphics 630
(Intel® Quick Sync Video)

RAM

16GB DDR4

Operating system (OS)

Windows 10 IOT Enterprise SAC

VMS/OS Storage

1 x 256GB (M.2 PCIe NVMe)

Number of hard-drives

2 x 3.5" (internal)

Raw storage (gross)

4/8/16/24/32 TB (Dell Enterprise Grade 24/7 Drives)

RAID Controller & Support

Intel® Rapid Storage Controller – RAID 0,1
(Software RAID)

Display ports

2 x DisplayPort™, 1 x VGA

Network interface

2 x 1 GbE (RJ45)

Available PCIe slots

One PCI Express® x16 Gen 3 slot full height
One PCI Express® x4 Gen 3 slot full height

Archiving to external NAS

Yes, through LAN port

Credential and Key encryption

Trusted Platform Module (TPM) 2.0

Redundant Power Supply

No

Remote management

No

General information

Hardware warranty

5 years full system warranty (incl. HDD)
Onsite support next business day¹

Dimensions

335 x 177 x 345 (mm)
13.19" x 6.95" x 13.58"

Weight

9.358 kg (min)
20.63 lb (min)

Power input

100~240V, 50/60 Hz

Max. power consumption

460W up to 90% efficiency (80 Plus Gold)

BTU Rating

1,570 BTU/h (max. theoretical)

Protection

OVP (over voltage), OCP (over current), OTP
(over temp), SCP (short circuit)

Husky IVO 350T



Environmental

This unit is intended for stationary server room and office use, according to the conditions stated below.

Operating temperature

0° - 35° C / 32° - 95° F

Storage temperature

-40° - 65° C / -40° - 149° F

Humidity

10 – 80% relative humidity (non-condensing)

Regulatory

Safety & emission standards

CE (class A), UKCA, FCC, RCM, UL, Mexico (NOM), VCCI

Trade compliance

NDAA Compliant

Ordering information

HE-350T-4TB	Husky IVO 350 Tower, Win10, 4TB	2 bays x 2TB
HE-350T-8TB	Husky IVO 350 Tower, Win10, 8TB	2 bays x 4TB
HE-350T-16TB	Husky IVO 350 Tower, Win10, 16TB	2 bays x 8TB
HE-350T-24TB	Husky IVO 350 Tower, Win10, 24TB	2 bays x 12TB
HE-350T-32TB	Husky IVO 350 Tower, Win10, 32TB	2 bays x 16TB

XProtect VMS software

Milestone Husky appliances are preloaded with Milestone XProtect VMS, which means that they can be used with any XProtect VMS variants. The required VMS licenses are purchased separately. The units can also be used with XProtect Essential+ with up to 8 cameras for free.

¹ Onsite intervention dispatched following Milestone's support processes – hardware Service Tag information accuracy required. Subject to regional availability, dependent on Dell Technologies support network.