

TOUCHLOCK vandal resistant metal keypad

System specifications


Cable Length	5m/16ft	
Cable extension length and type	≤ 25m/82ft ≤ 100m/328ft	Belden 9538/ Belden 5506FE (USA) Belden 9540/ Belden 5306FE (USA)
Backlit Keypad	Yes	
Electrical		
Operating Voltage	10V - 14V DC	
Current consumption	120mA	
Environment		
Operating temperature	-20°C - +55°C -4°F - +131°F	
Moisture resistance	IPX7	
Vandal Resistance	High	



The vandal resistant metal keypads are devices that offer the simplicity of PIN or Code authentication for system users.

They are available for use with both Switch2 and Net2 systems. The reader is wired as shown on the control unit label.

By default, all the reader LEDs state is Green. If access is granted, the reader flashes Green. If access is denied, the reader flashes Red. An audible tone is emitted in both cases.

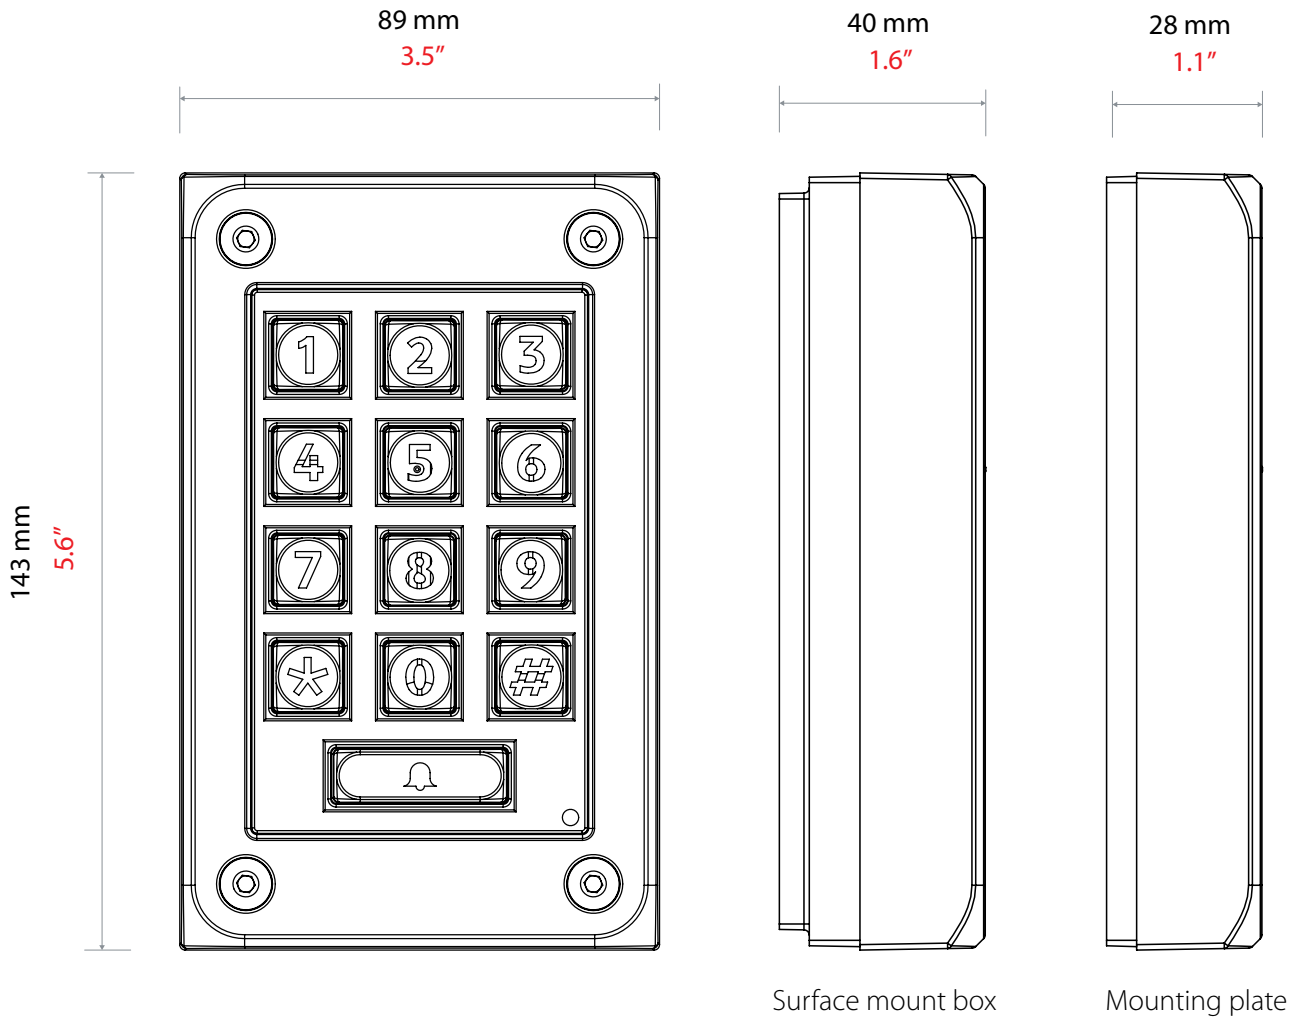

Accessories and sales codes

TOUCHLOCK vandal resistant metal keypad

521-715