

STEALTH

LOCKING

STEALTH01DS




SLIM UNMONITORED MAGLOCK WITH DOOR STATUS MONITORING

The compact design of this magnetic lock makes it ideal for most indoor applications where 275kg holding force is sufficient. This model includes door status monitoring contacts to monitor the door position (open or closed).

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Stealth black finish
- Door status monitoring

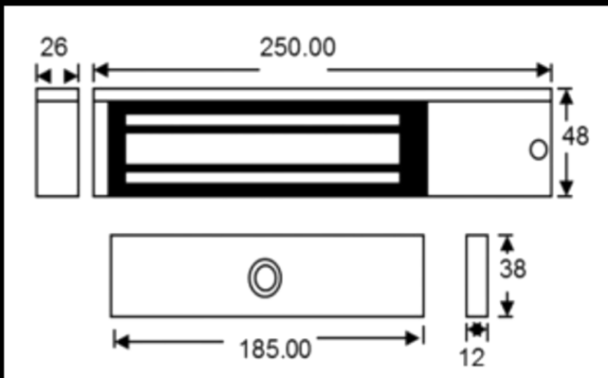

TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C; Humidity: 0 -95% non- condensating
- 250mm X 48 X 26 (Mag dimension)
- Weight: 2kg approx.
- Reed switch door contact
- Fire rated

SALES@STEALTHLOCKING.CO.UK