

# STEALTH

---

## LOCKING

### STEALTH40DS



### STANDARD DOUBLE MAGLOCK MONITORED WITH DOOR STATUS MONITORING


Standard monitored double magnetic lock designed for indoor applications where 545kg holding force is required. LED lock status indication and relay contacts for signalling. Includes door status monitoring contacts to monitor the door position.

#### FEATURES

- ◆ MOV provides spike and surge protection
- ◆ Fail-safe operation (power to lock)
- ◆ Anti-residual magnetism protection
- ◆ Top-plate, armature-plate and fixings included
- ◆ Dual voltage 12Vdc or 24Vdc (selectable)
- ◆ Surface mount
- ◆ Stealth black finish
- ◆ Lock monitoring
- ◆ Door status Monitoring
- ◆ Fire rated

#### TECHNICAL INFORMATION

- ◆ Holding force: up to 545kg (1200lb) per side
- ◆ Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- ◆ Voltage tolerance: +/- 15%
- ◆ Operating temp: -10°C to +55°C
- ◆ Humidity: 0-95% non condensating
- ◆ Weight: 9.6kg approx.
- ◆ Relay: COM/NO/NC (1A@ 24Vdc) (one per side)
- ◆ Reed switch door contact (one per side)

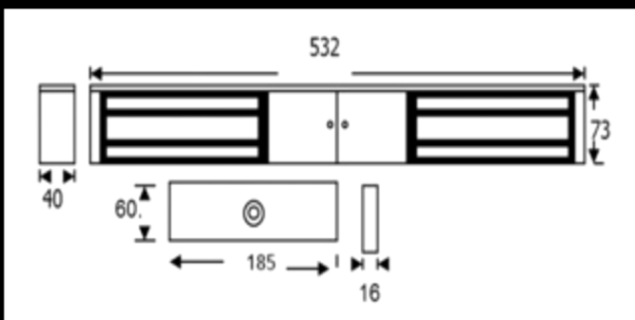

[SALES@STEALTHLOCKING.CO.UK](mailto:SALES@STEALTHLOCKING.CO.UK)