

STP-EM20


Single standard maglock, monitored



Standard single monitored magnetic lock, designed for indoor applications where 545kg holding force is required. Monitoring provides LED lock status indication and relay contacts for signalling.

Features

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring

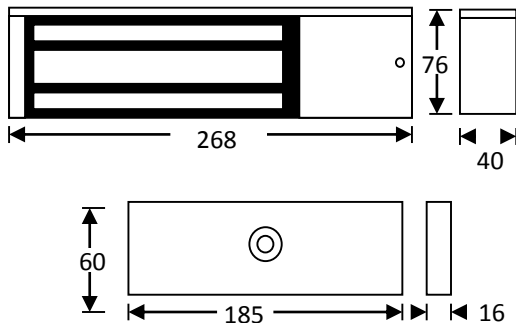

Technical Information

- Holding force: up to 545kg (1200lb)
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4.8kg approx.
- Red/Green LED indicator
- Relay: COM/NO/NC (1A@24Vdc)

Related Products

EM20DS



EM500L



EM500ZL



EM-AH10-1

