

MAYFLEX


STP-SL705-30 30mm wide shearlock, monitored



This monitored shearlock is recommended for use on doors where a concealed lock is required. Ideal for double-action swing doors (i.e. swings in both directions) or for sliding doors. Suitable for horizontal or vertical installation.

Features

- Mortice fitting
- Suitable for double swing doors, or sliding doors
- Horizontal or vertical installation.
- Lock monitoring (magnetic bond sensor)
- Surface housing available (part ARCH705-30)
- Anti-residual magnetism design
- Locking time delay: 1-6 seconds (adjustable)

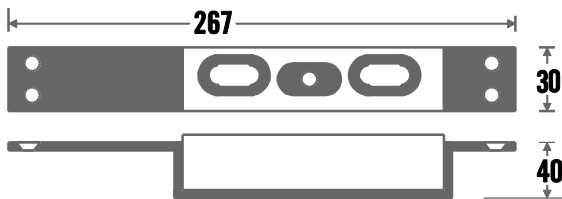

Technical Information

- Voltage 12-24Vdc (auto-selectable)
- Current Draw:
Pull-in current: 1.7A @ 12 Vdc; 1.1A @ 24 Vdc
Holding current: 500mA @ 12 Vdc; 320mA @ 24 Vdc
- Lock monitoring contact (SPDT), rated: 1A @ 30 Vdc
- Holding Force: Up to 909kg (2000 lbs) in shear.
- Permissible gap between lock and armature plate = 3mm max.
- Weight : 1.8 kg approx.

Related Products

ARCH705-30



SL705-35



GS200M



SL183

