

VB400 14-PORT DOCK

Host multiple VB400 cameras for simultaneous rapid charging, configuration and video downloading.



GENERAL INFORMATION

Product Code VB-400-DOCK-14/UK, VB-400-DOCK-14/EU, VB-400-DOCK-14/US, VB-400-DOCK-14/AUS, VB-400-DOCK-14/ROW

Hosts Multiple VB400s 14 VB400 camera ports

Scalability Multiple docking stations can be connected to a DockController

Compatibility Compatible with DockController DC-200

Easy To Deploy Connection is a single USB to the DockController, and a mains adaptor for power - USB cable supplied

Eliminates need for separate wiring to each camera

Speedy Plug-in / Pull-out Connectivity VB400 cameras can be easily docked or undocked for speedy use

Flexible Docking Flexible for use with camera accessories attached. Can be securely fastened to a shelf or other mounting surface - can be secured at an angle

Warranty 1 year return-to-manufacturer warranty including email and telephone support

Extended warranty available

SIZE AND WEIGHT

Dimensions 200mm x 38mm x 436mm

Weight 2.2kg (3.5kg boxed)


CHARGING, POWER & INTERFACE

Charging Up to 8 hrs from a fully flat VB400 battery.

Power Requirement 12V/5A PSU, input 100-240V (PSU supplied).

Interface USB 2.0 compatible

USB 3.0 compatible

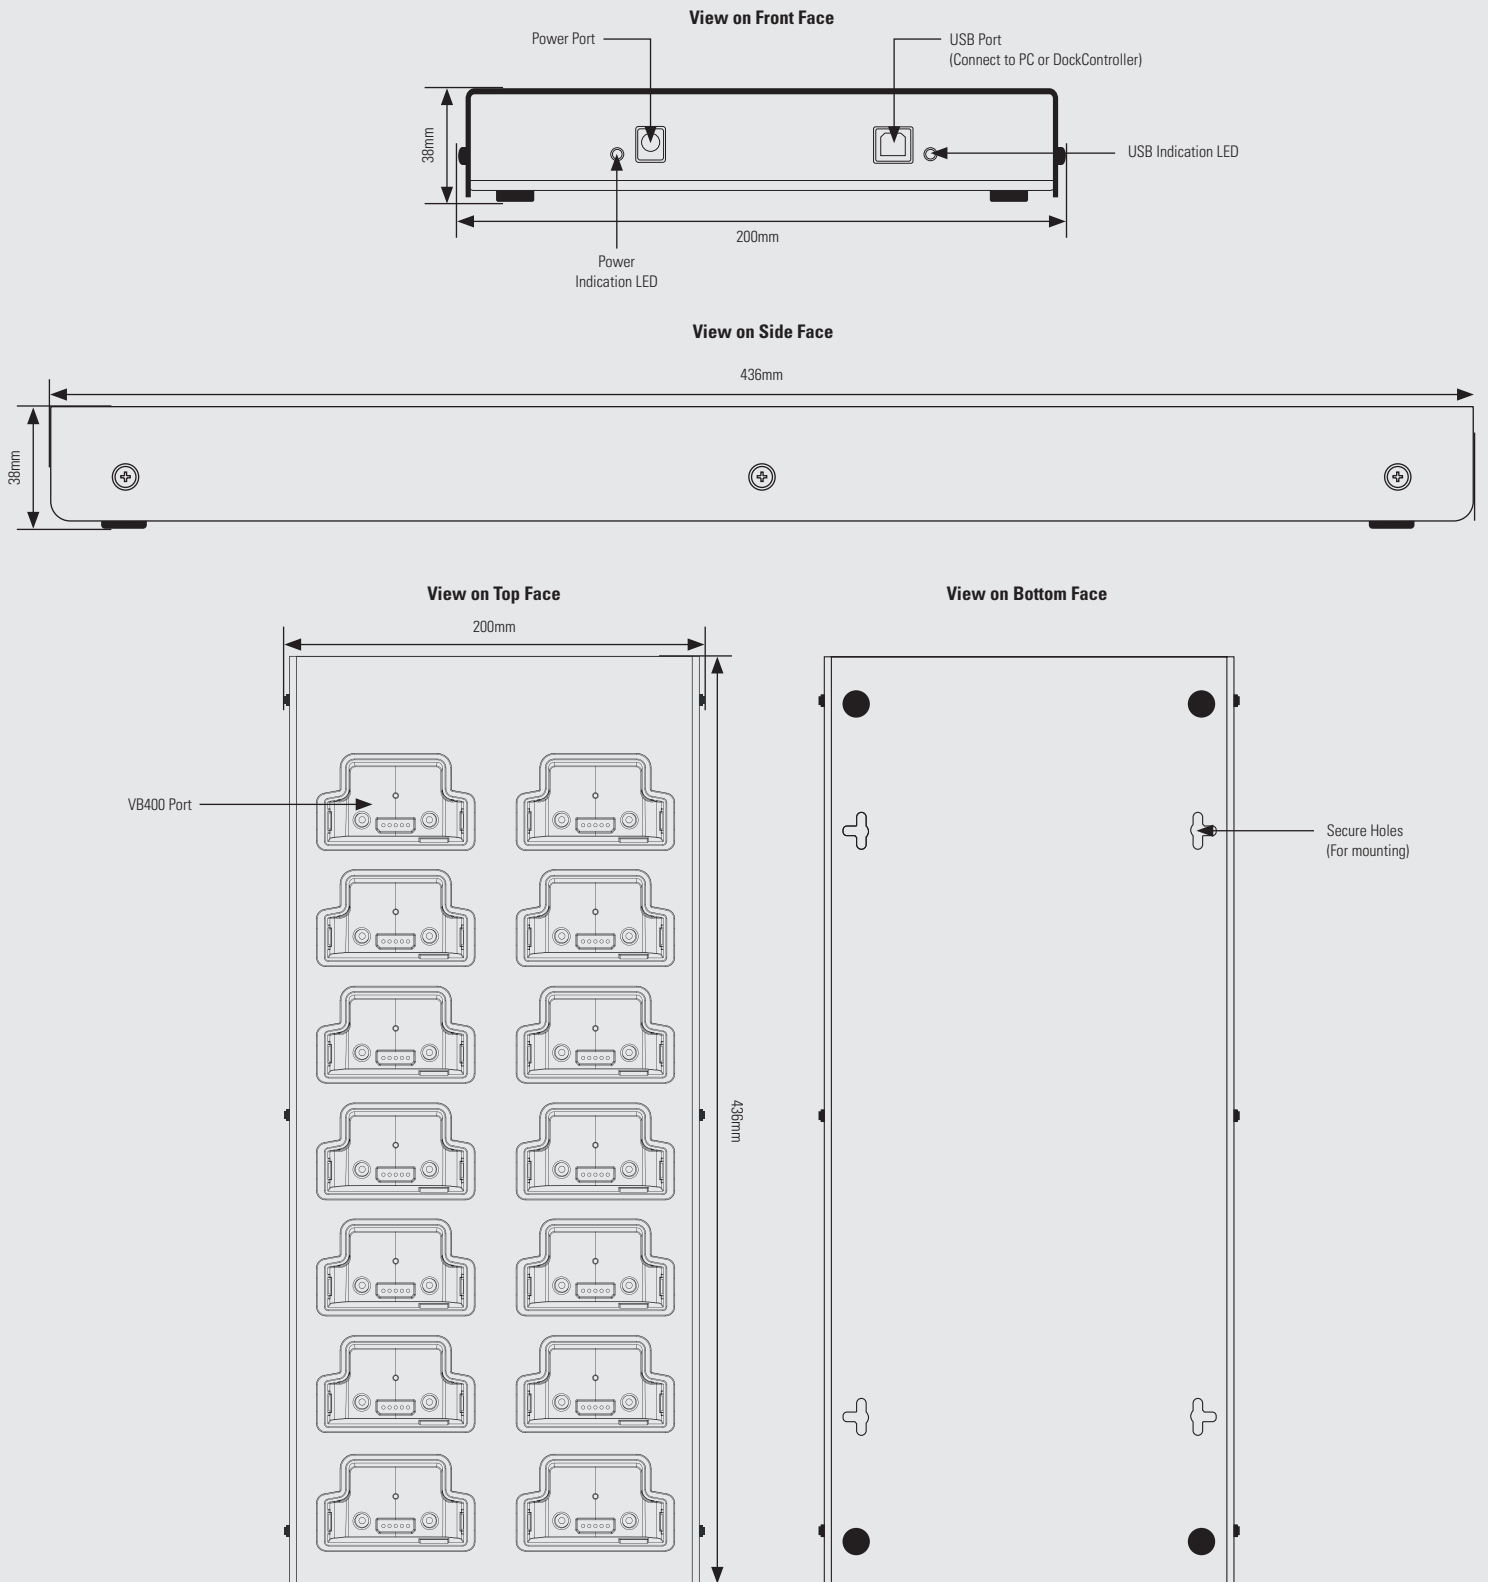

For more information, please visit: www.motorolasolutions.com

Motorola Solutions Ltd. Nova South, 160 Victoria Street, London, SW1E 5LB, United Kingdom

Availability is subject to individual country law and regulations. All specifications shown are typical unless otherwise stated and are subject to change without notice. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.
 © 2020 Motorola Solutions, Inc. All rights reserved. (09/20) (ED-002-048-09)